







**[www.mmp-weapons.com](http://www.mmp-weapons.com)**

**13 Simeonovska Str., Simeonovo quarter, Sofia, Bulgaria**

**e-mail: [investment.ltd@mmp-weapons.com](mailto:investment.ltd@mmp-weapons.com)**

**[mmp.investment.ltd@gmail.com](mailto:mmp.investment.ltd@gmail.com)**

**phone: +359 2 961 40 40**



**[www.mmp-weapons.com](http://www.mmp-weapons.com)**

**Str. Zagorska 13 B, Belgrade 11 000, Serbia**

**e-mail: [consulting.doo@mmp-weapons.com](mailto:consulting.doo@mmp-weapons.com)**

**[mmp.consulting.doo@gmail.com](mailto:mmp.consulting.doo@gmail.com)**

**phone: +381 112 648 960**



# WEAPONS

МЕЧЬОУЗ

ОРУЖЈЕ ~ ОРУЖИЕ ~ ОРЪЖИЯ ~ السلاح ~ SİLAHLAR

# EXPLOSIVES

ЕХЪГОСИВЪ

and

# AMMUNITIONS

АММУНИЦИИ

ЕКСПЛОЗИВИ И МУНИЦИЈЕ ~ ВЗРЫВЧАТЫЕ ВЕЩЕСТВА И БОЕПРИПАСЫ  
ЕКСПЛОЗИВИ И БОЕПРИПАСИ ~ المتفجرات والامانات ~ PATLAYICILAR VE MÜNİTLER



# WEAPONS

|                                                                                     |                                            |    |
|-------------------------------------------------------------------------------------|--------------------------------------------|----|
|    | <b>Assault rifle M70</b>                   | 10 |
|    | <b>Assault rifle M92</b>                   | 11 |
|    | <b>Assault rifle M05</b>                   | 12 |
|    | <b>Assault rifle M21</b>                   | 13 |
|    | <b>Sniper rifle M76</b>                    | 14 |
|    | <b>Sniper rifle M91</b>                    | 15 |
|    | <b>Sniper rifle M93</b>                    | 16 |
|    | <b>Pistol CZ999</b>                        | 17 |
|   | <b>Machine gun M84</b>                     | 18 |
|  | <b>Machine gun M02</b>                     | 19 |
|  | <b>Machine gun M86</b>                     | 20 |
|  | <b>BGP 40 mm M70</b>                       | 21 |
|  | <b>BGP 40 mm</b>                           | 21 |
|  | <b>BGP 40x46 mm</b>                        | 21 |
|  | <b>Automatic grenade launcher M93 30mm</b> | 22 |
|  | <b>BRB7</b>                                | 23 |
|  | <b>RPG-22</b>                              | 24 |
|  | <b>ROG-22</b>                              | 25 |
|  | <b>DTRG 73</b>                             | 26 |



|                                 |           |
|---------------------------------|-----------|
| <b>Antitank sistem MALYUTKA</b> | <b>27</b> |
|---------------------------------|-----------|



|              |           |
|--------------|-----------|
| <b>9K111</b> | <b>28</b> |
|--------------|-----------|



|                      |           |
|----------------------|-----------|
| <b>9K113 KONKURS</b> | <b>29</b> |
|----------------------|-----------|



|                    |           |
|--------------------|-----------|
| <b>9K115 METIS</b> | <b>30</b> |
|--------------------|-----------|



|                       |           |
|-----------------------|-----------|
| <b>107mm FIREBALL</b> | <b>31</b> |
|-----------------------|-----------|



|                 |           |
|-----------------|-----------|
| <b>20/3 M55</b> | <b>32</b> |
|-----------------|-----------|



|                |           |
|----------------|-----------|
| <b>ZU 23/2</b> | <b>33</b> |
|----------------|-----------|



|            |           |
|------------|-----------|
| <b>M60</b> | <b>34</b> |
|------------|-----------|



|                 |           |
|-----------------|-----------|
| <b>60mm M67</b> | <b>35</b> |
|-----------------|-----------|



|                 |           |
|-----------------|-----------|
| <b>60mm M60</b> | <b>35</b> |
|-----------------|-----------|



|                           |           |
|---------------------------|-----------|
| <b>60mm M60C Commando</b> | <b>35</b> |
|---------------------------|-----------|



|                 |           |
|-----------------|-----------|
| <b>82mm M69</b> | <b>36</b> |
|-----------------|-----------|



|                  |           |
|------------------|-----------|
| <b>120mm M74</b> | <b>37</b> |
|------------------|-----------|



|                  |           |
|------------------|-----------|
| <b>120mm M75</b> | <b>37</b> |
|------------------|-----------|

# EXPLOSIVES and AMMUNITIONS

|                                                                                     |                                                      |    |
|-------------------------------------------------------------------------------------|------------------------------------------------------|----|
|    | <b>OCTOGEN H M X</b>                                 | 38 |
|    | <b>HEXOGEN R D X</b>                                 | 39 |
|    | <b>TRINITROTOLUENE T N T</b>                         | 40 |
|    | <b>HAND GRENADES</b>                                 | 41 |
|    | <b>MINES (ANTI-PERSONNEL and ANTI-TANK)</b>          | 42 |
|    | <b>AMMUNITIONS cal. 9 x 19 mm</b>                    | 44 |
|    | <b>AMMUNITIONS cal. 5,56 mm</b>                      | 45 |
|    | <b>AMMUNITIONS cal. 7,62 mm</b>                      | 46 |
|    | <b>AMMUNITIONS cal. 7,9 mm</b>                       | 49 |
|    | <b>AMMUNITIONS cal. 12,7 mm</b>                      | 50 |
|  | <b>AMMUNITIONS BLANCK</b>                            | 53 |
|  | <b>GRENADES cal. 30 mm</b>                           | 54 |
|  | <b>GRENADES cal. 40 mm</b>                           | 55 |
|  | <b>GRENADES cal. 73 mm</b>                           | 57 |
|  | <b>MORTAR SHELLS cal. 60, 82 and 120 mm</b>          | 58 |
|  | <b>HE-FRAG and SMOKE ARTILLERY AMM.</b>              | 61 |
|  | <b>ILLUMINATION ARTILLERY AMMUNITIONS</b>            | 63 |
|  | <b>ARTILLERY AMMUNITIONS cal. 155 mm</b>             | 64 |
|  | <b>MUNITIONS cal. 125 mm (for tanks T72 and M84)</b> | 65 |
|  | <b>ROCKETS FOR MULTI-TUBE LAUNCHERS</b>              | 66 |
|  | <b>AIRCRAFT ROCKETS</b>                              | 67 |
|  | <b>AIR BOMBS</b>                                     | 68 |
|  | <b>TORPEDO</b>                                       | 69 |



# WEAPONS

# МЕАЬОВЪ



ОРУЖЈЕ ~ ОРУЖИЕ ~ ОРЪЖИЯ ~ السلاح ~ SİLAHLAR

## LEGEND



NUMBER OF ROUNDS



RATE OF FIRE



WEIGHT (kg)



PICATINNY RAIL and "O' CLOCK" DIRECTION

# MMP

## ASSAULT RIFLE

### M70

Assault rifle M70 is designed based on the Kalashnikov principle, but with some alterations of the basic AK design (milled receivers, threaded barrels, gas cutoffs for grenade launching etc).

It is still very popular, because it has confirmed its reliability in all environments.



#### Basic tactical and technical characteristics:

| Caliber      | Barrel length | Rate of fire     |
|--------------|---------------|------------------|
| 7,62 x 39 mm | 415 mm        | 620 ± 60 rds/min |

#### Models:

**M70 B1**  
(image on top)

**M70 AB2**



|         |         |            |
|---------|---------|------------|
| Length  | 920 mm  | 915/672 mm |
| Weight: | 4,17 kg | 3,97 kg    |

#### Complete set:

- Assault rifle M70 B1
- 4 spare magazines
- Sling
- Blank ammunition attachment
- Rifle grenade
- Accessories
- Handling and maintenance manuals

#### Optionally, the set includes:

+ Picatinny rail, enables the assembly of optical-electronic devices



+ BGP 40 mm M70



# MMP

## ASSAULT RIFLE

### M92

Assault rifle M92, developed based on assault rifle M70, is customized for usage in closed and limited space: rooms, vehicles, armored and unarmored combat vehicles etc.



#### Basic tactical and technical characteristics:

| Caliber      | Barrel length | Length       |              | Weight: | Rate of fire     |
|--------------|---------------|--------------|--------------|---------|------------------|
|              |               | Total lenght | Folded stock |         |                  |
| 7,62 x 39 mm | 254 mm        | 795 mm       | 550 mm       | 3,57 kg | 620 ± 60 rds/min |

#### Complete set:


- Assault rifle
- 4 spare magazines
- Sling
- Accessories
- Handling and maintenance manual

# MMP

## ASSAULT RIFLE

### M05

Assault rifle M05 belongs to a group of new models of assault rifles caliber 7.62x39 mm. All excellent characteristics of assault rifles M70 are kept in this model and many upgraded characteristics are the result of modern tactic demands.

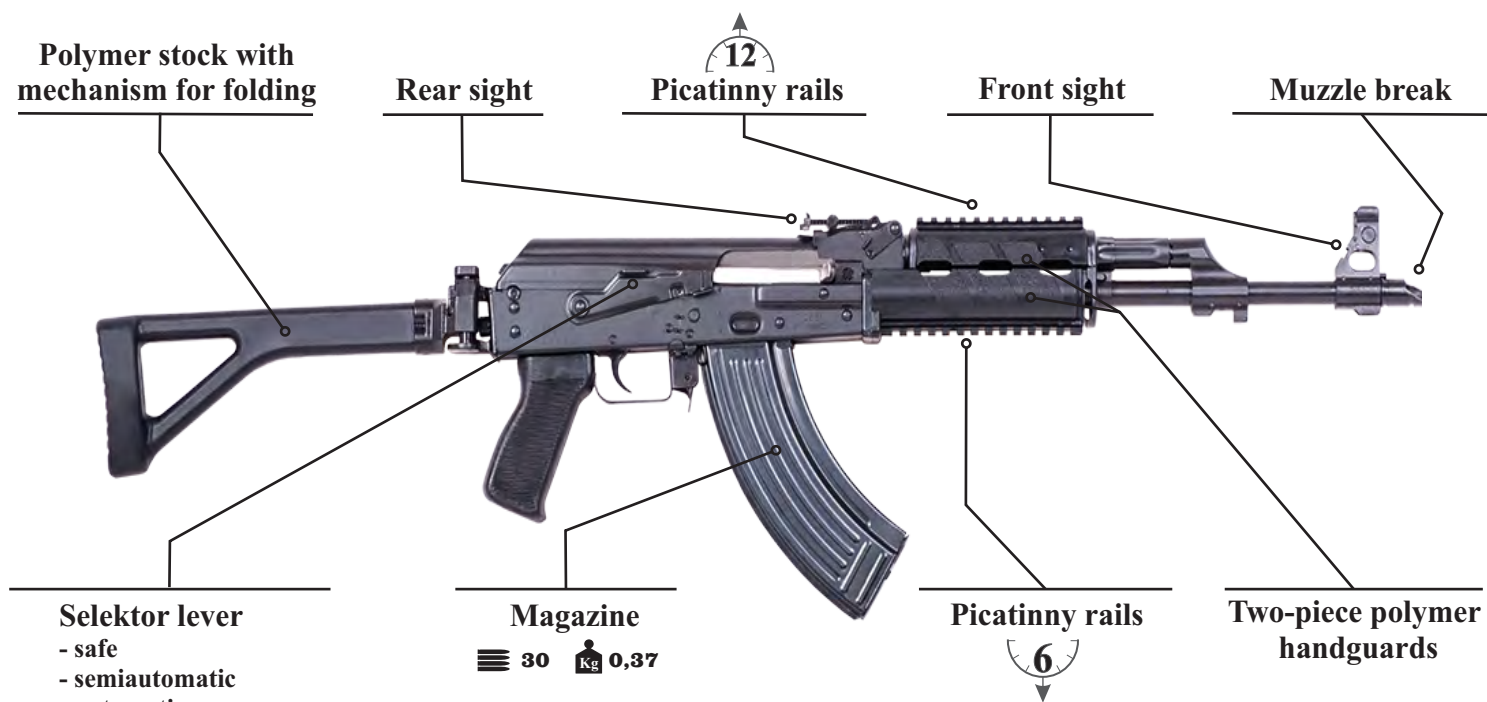

#### Basic tactical and technical characteristics:

| Caliber      | Barrel length | Length       |              | Rate of fire     |
|--------------|---------------|--------------|--------------|------------------|
|              |               | Total length | Folded stock |                  |
| 7,62 x 39 mm | 415 mm        | 934 mm       | 689 mm       | 620 ± 60 rds/min |

#### Models:

##### M05 E1

basic model (*image on top*)  
no possibility of  
attaching optical sight mount  
to the receiver

Weight: 4,05 kg

##### M05 E2

carrier for Picatinny rail  
on the left side of the receiver

Weight: 4,15 kg



##### M05 E3

Picatinny rail on the  
top of the dust cover

Weight: 4,25 kg



#### Complete set:

- Assault rifle
- 4 spare magazines
- Sling
- Accessories
- Handling and maintenance manual

#### Optionally, the set includes:

+ Picatinny rails



+ Polymer magazine



+ BGP 40 mm



+ BGP 40x46 mm



# MMP

## ASSAULT RIFLE

### M21

Assault rifle M21 belongs to a group of new models assault rifles from based on assault rifle M05 in caliber 5,56 x 45 mm.



#### Models and basic tactical and technical characteristics:

|                               | M21 A                                                                                                                  | M21 S                                | M21 ABS                                                                                   | M21 SBS                              |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------|--------------------------------------|-------------------------------------------------------------------------------------------|--------------------------------------|
|                               | The base fixed on the left side of the receiver for Picatinny rails or various types of optical and electronic devices | Barrel length is shorter for - 85 mm | Two-piece handguards with Picatinny rails and Picatinny rail on the top of the dust cover | Barrel length is shorter for - 85 mm |
| Total lenght/<br>Folded stock | 1000/750 mm                                                                                                            | 915/666 mm                           | 1000/750 mm                                                                               | 915/666 mm                           |
| Barrel length:                | 460 mm                                                                                                                 | 375mm                                | 460 mm                                                                                    | 375 mm                               |
| Weight:                       | 4,15 kg                                                                                                                | 4,07 kg                              | 4,3 kg                                                                                    | 4,2 kg                               |

#### Complete set:

- Assault rifle
- 4 spare magazines
- Sling
- Accessories
- Handling and maintenance manual

#### Optionally, the set includes:




# MMP

## SNIPER RIFLE

### M76

Semi-automatic sniper rifle M76 is developed in the mid-1970s. With the caliber 7,92×57mm Mauser and exception of the gas regulator, disassembly and operation are similar to that of the M70 family of weapons.

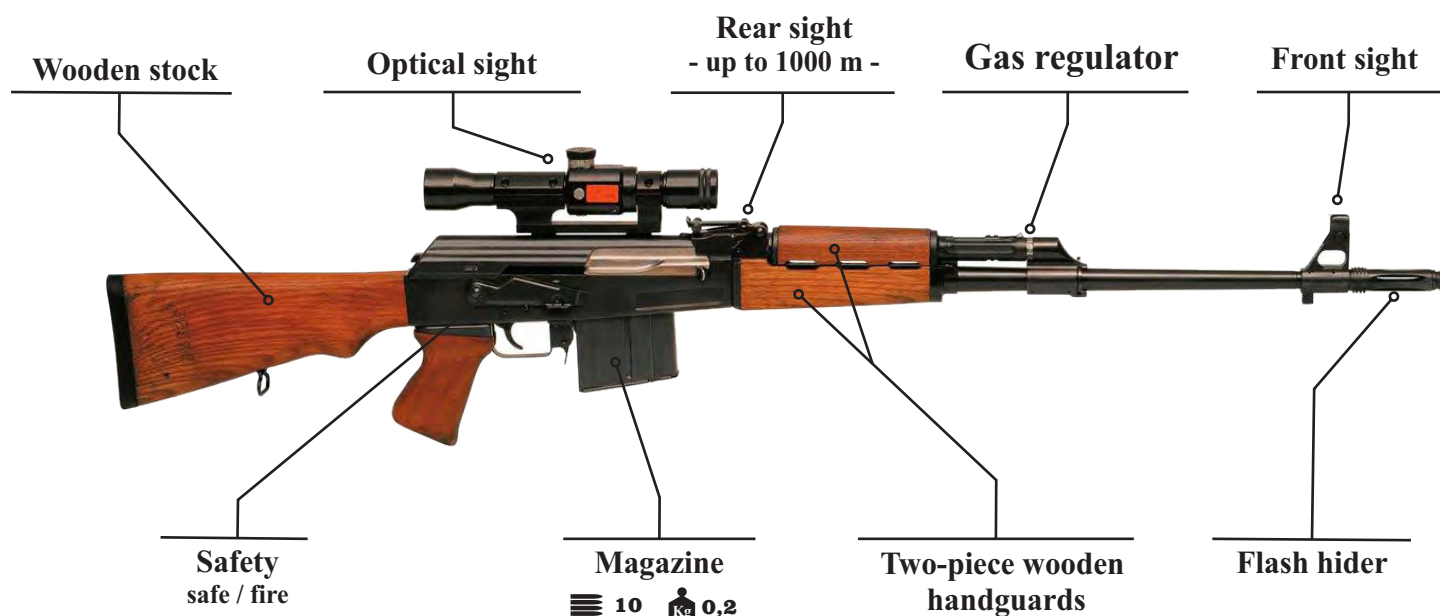

#### Basic tactical and technical characteristics:

| Caliber      | Number of grooves | Barrel length | Length  | Weight without OS | Maximum effective range |
|--------------|-------------------|---------------|---------|-------------------|-------------------------|
| 7,92 x 57 mm | 4                 | 550 mm        | 1135 mm | 4,6 kg            | 1000 m                  |

- Rifle sights: telescopic sight ZRAK ON-M76 4×5°10' with bullet drop compensation markings and the radioactive illumination warning, mechanically adjustable iron sights with a sliding tangent rear sight which can be adjusted from 100 m to 1.000 m, rifle telescopic scope M93 6x32 and night telescopic sight 5x80.
- Optionally, it uses also Suppressor (give suffocation - 10 dB with standard ammunition and -20 dB with special ammunition)

#### Complete set:

Sniper rifle M76

Sling

Accessories

Bag



Telescopic sight

Combat knife


Optical sight cover

# MMP

## SNIPER RIFLE

### M91

Semi-automatic sniper rifle M91 is designed based on the Kalashnikov system. The basic request of police and army forces - exceptional precision at large distances - is fulfilled and confirmed in extreme conditions.

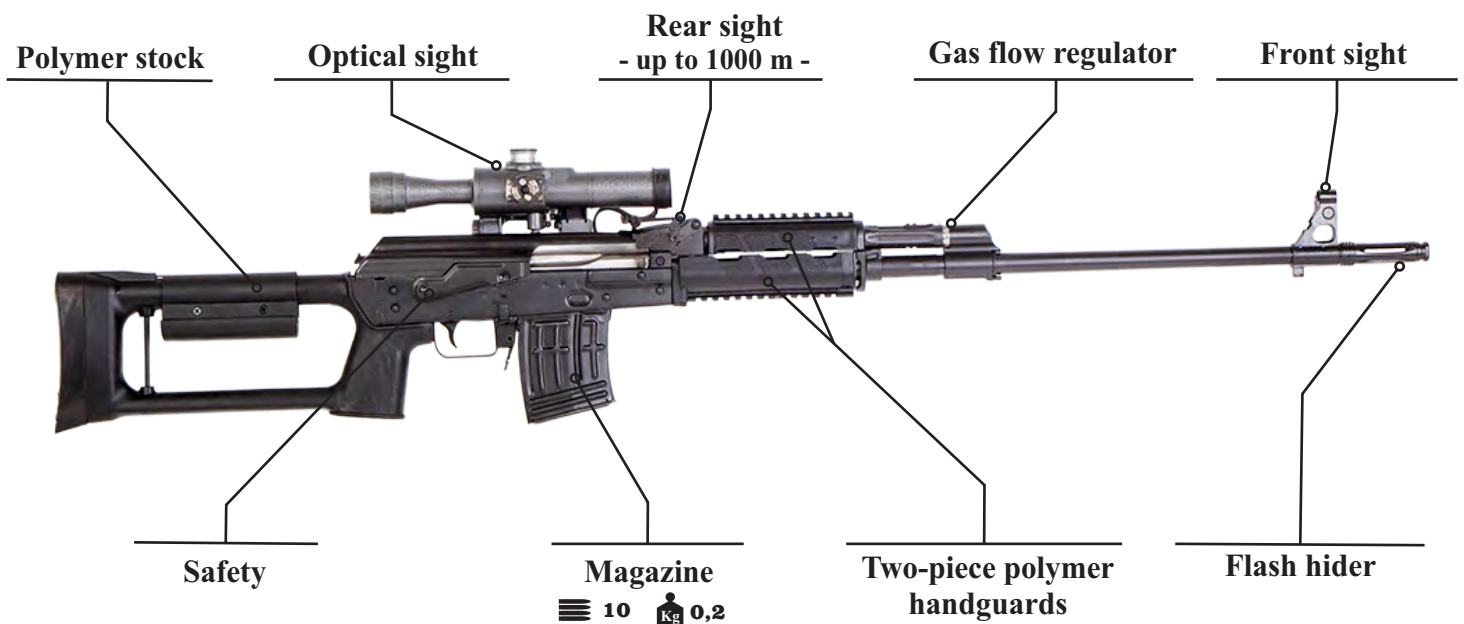

#### Basic tactical and technical characteristics:

| Caliber       | Number of grooves | Twist rate | Barrel length | Weapon length | Weight with OS | Maximum effective range |
|---------------|-------------------|------------|---------------|---------------|----------------|-------------------------|
| 7,62 x 54R mm | 4                 | 240 mm     | 620 mm        | 1200 mm       | 5,5 kg         | 1000 m                  |
| 7,62 x 51 mm  | 6                 | 254 mm     |               |               |                |                         |


- The rifle has two safety systems: 1. mechanical safety with two positions: safe / fire 2. safety system that prevents firing before the bolt is locked.
- Gas flow regulator enables using the weapon in extreme conditions and also when the weapon is very dirty.
- The base fixed on the left side of the receiver enables assembling various types of optical and electronic devices.
- Silencer can be quickly and easily assembled to the rifle; it reduces the noise level by at least 12dB and gives wrong impression about the position of the sound source.

#### Complete set:

- Sniper rifle M91
- 4 spare magazines
- Sling
- Optical sight
- Cleaning kit
- Bag
- Handling and maintenance instruction manuals

#### Optionally, the set includes:

+ Silencer

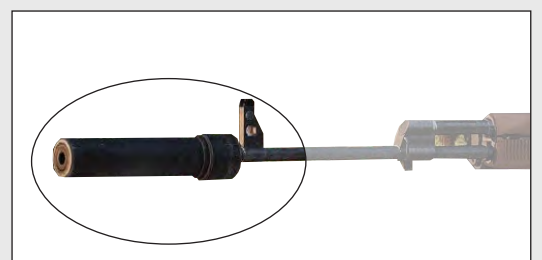


# MMP

## LONG RANGE RIFLE

### M93

Long range rifle M93 is designed based on the Mauser action system, which is proven to be a precise and reliable system of bolt-action guns. Its purpose is elimination of various types of targets at large distances, up to 1800 m, in all conditions and environments.

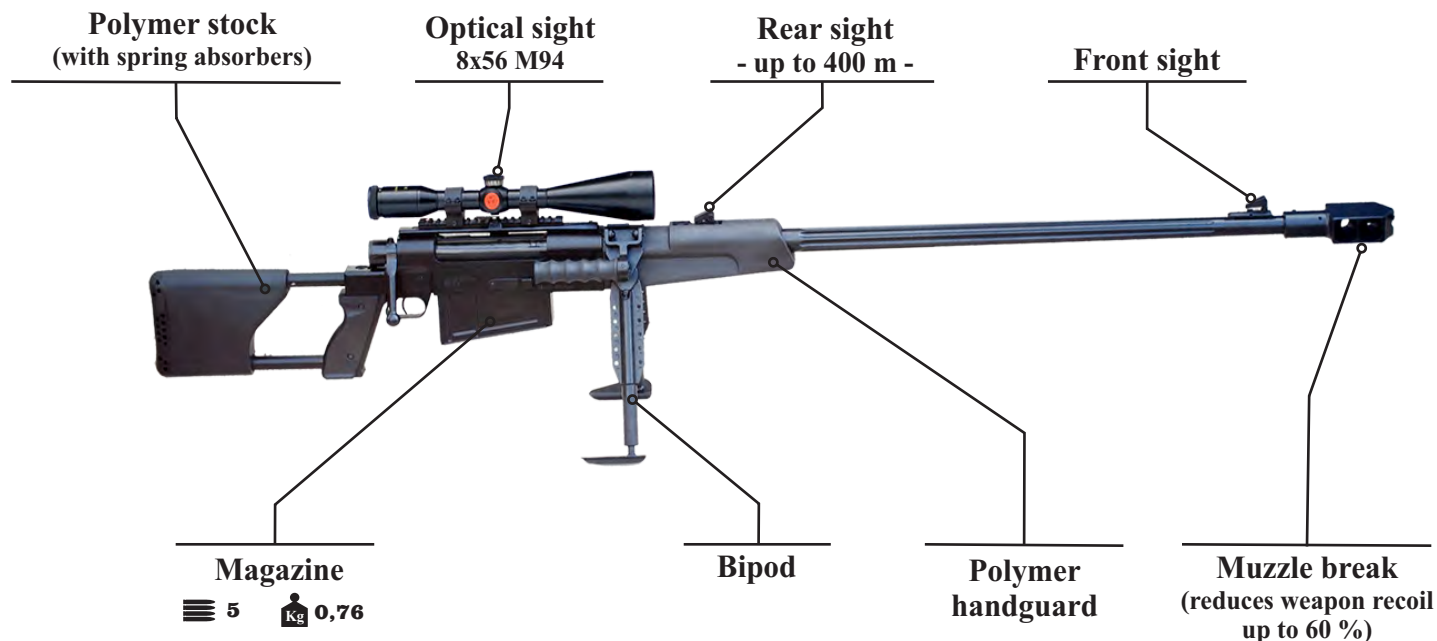

#### Basic tactical and technical characteristics:

| Caliber                        | Number of grooves | Twist rate | Barrel length | Weapon length | Weight with OS | Maximum effective range |
|--------------------------------|-------------------|------------|---------------|---------------|----------------|-------------------------|
| 12,7 x 108 mm                  | 8                 | 381 mm     | 1007 mm       | 1670 mm       | 16,7 kg        | 1800 m                  |
| 12.7 x 99 mm<br>(.50 Browning) |                   |            | 837 mm        | 1500 mm       | 16,3 kg        |                         |

- Long range rifle M93 is designed with two calibers: 12,7x108 mm and 12,7x99 mm (.50 Browning).
- Cold forged heavy barrel with chrome plated interior provides exceptional precision at large distances. Flutes on the barrel exterior make the cooling easier and provide precision in hard conditions.
- Handguard and stock are made of polymer, reinforced with glass fibres. Stock has absorbers that reduce the recoil effect on the shooter.


#### Complete set:

- Long range rifle M93
- Optical sight
- Tools
- Accessories
- Carrying case / holster
- Bag for spare tools and accessories
- Ammunition bag
- Ear protection
- Handling and maintenance manuals

# MMP

## PISTOL CZ 999

Pistol CZ999 is a modern weapon used as a service gun or a personal defense gun. Due to its excellent design solutions, ergonomics and state-of-the art technology in production, this weapon stands out with its precision, accuracy and functionality.

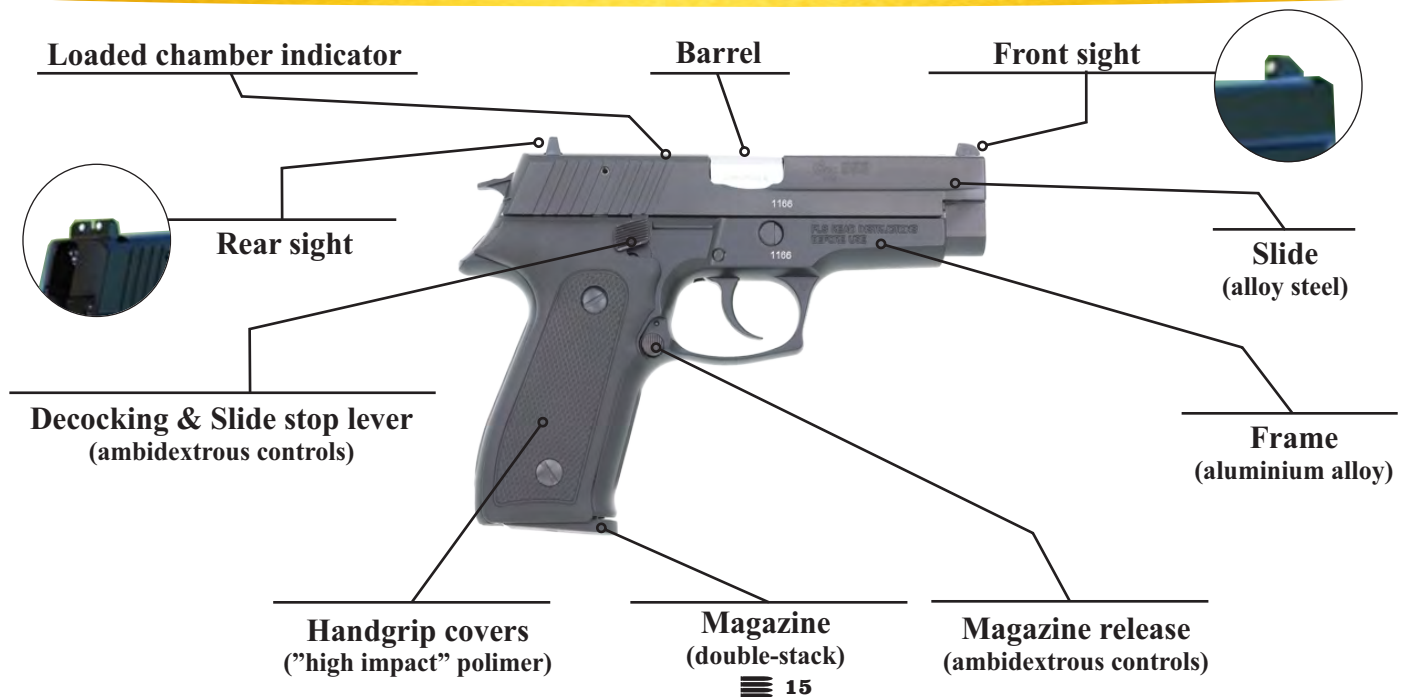

### Models and basic tactical and technical characteristics:

#### CZ 999 Compact

|                |        |
|----------------|--------|
| Total lenght   | 188 mm |
| Barrel length: | 98 mm  |
| Weight:        | 0,9 kg |



Caliber: 9 mm PARA

#### *(image on top)* CZ 999

|                |         |
|----------------|---------|
| Total lenght   | 198 mm  |
| Barrel length: | 108 mm  |
| Weight:        | 0,94 kg |

- The pistol is a semi-automatic weapon, functioning on the short recoil of the barrel principle.
- Locking is achieved by vertical oscillation of the barrel that comes into the hole on the slide.
- The pistol functions as a single action or a double action gun.
- The pistol has ambidextrous controls - it can be operated by right or left hand.
- Standard finish includes phosphatizing and painting of aluminum parts, while the steel parts are blued.

### Complete set:




# MMP

## MACHINE GUN

### M84

Machine gun M84 is designed based on the Kalashnikov system, with the gas flow regulator and gas tube placed under the barrel.

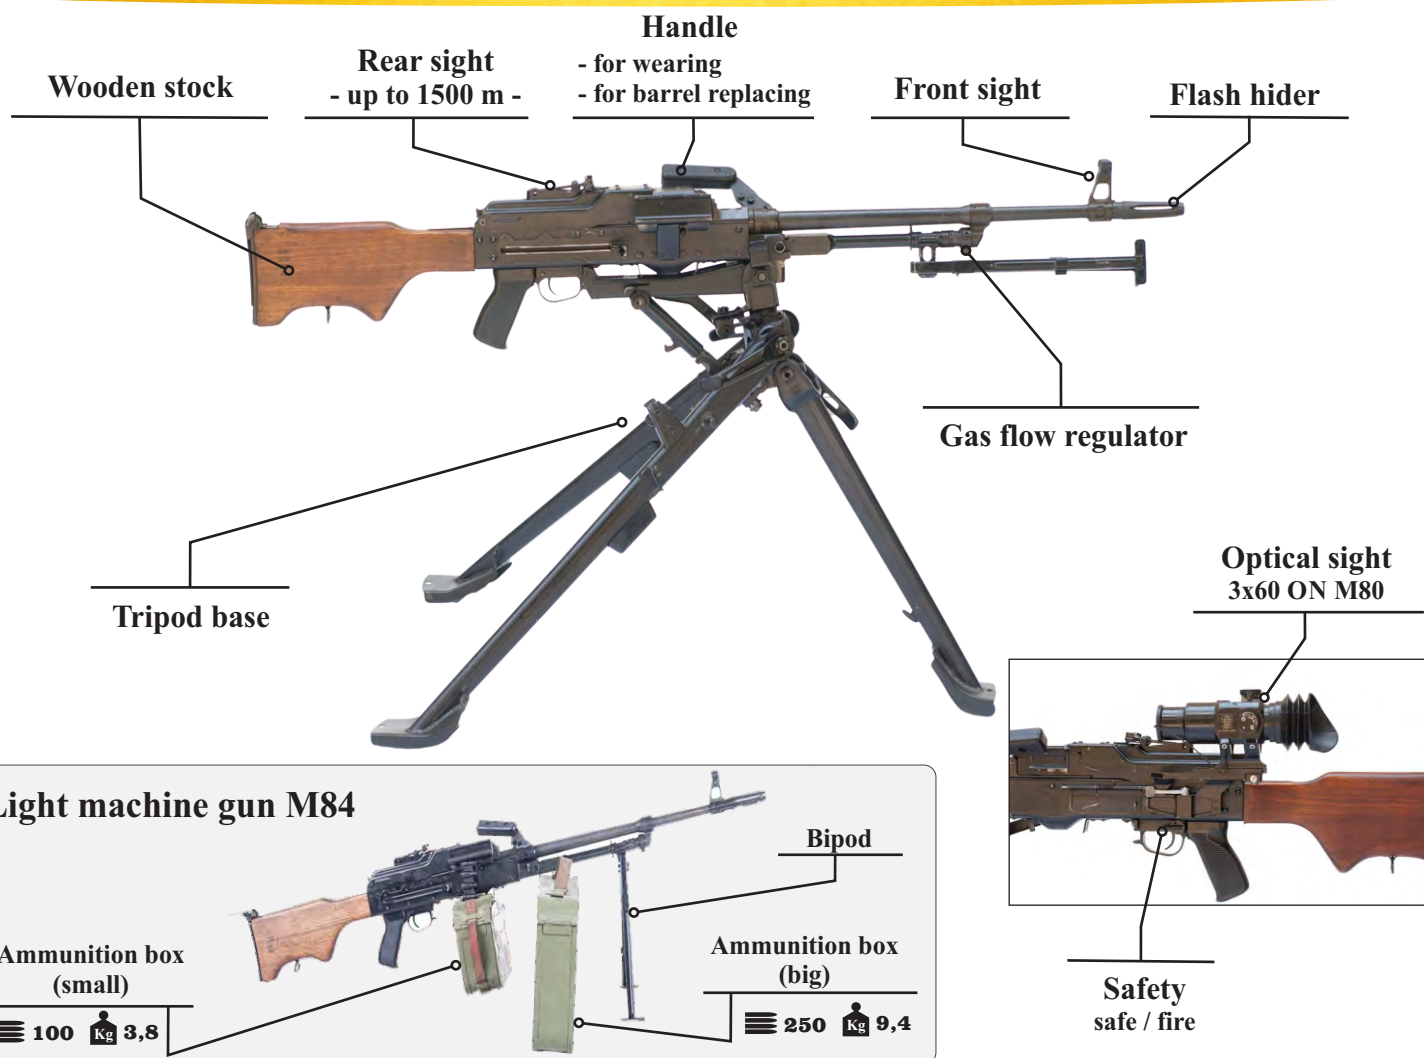

#### Basic tactical and technical characteristics:

| Caliber       | Number of grooves | Twist rate | Barrel length | Weight with tripod | Weight tripod base | Maximum effective range | Rate of fire      |
|---------------|-------------------|------------|---------------|--------------------|--------------------|-------------------------|-------------------|
| 7,62 x 54R mm | 4                 | 603 mm     | 1190 mm       | 13,3 kg            | 5 kg               | 1000 m                  | 700 - 800 rds/min |

#### Complete set:

- Light machine gun M84
- Belt for 250 cartridges
- Box for the 250 cartridges belt
- Belt for 100 cartridges
- Box for the 100 cartridges belt
- Sling
- Blank ammunition attachment
- Spare parts
- Tools and accessories
- Sling for tripod base
- Sling for ammunition box
- Handling and maintenance manuals
- Packing case

#### Optionally, the set includes:

- + Optical sight with mount
- + Spare barrel
- + Belt filler




# MMP

## MACHINE GUN

### M02

Machine gun M02 Coyote is formed by mounting the machine gun M87 to the cradle connected with the tripod. Machine gun M87 is licensed product based on the Soviet machine gun NSV.

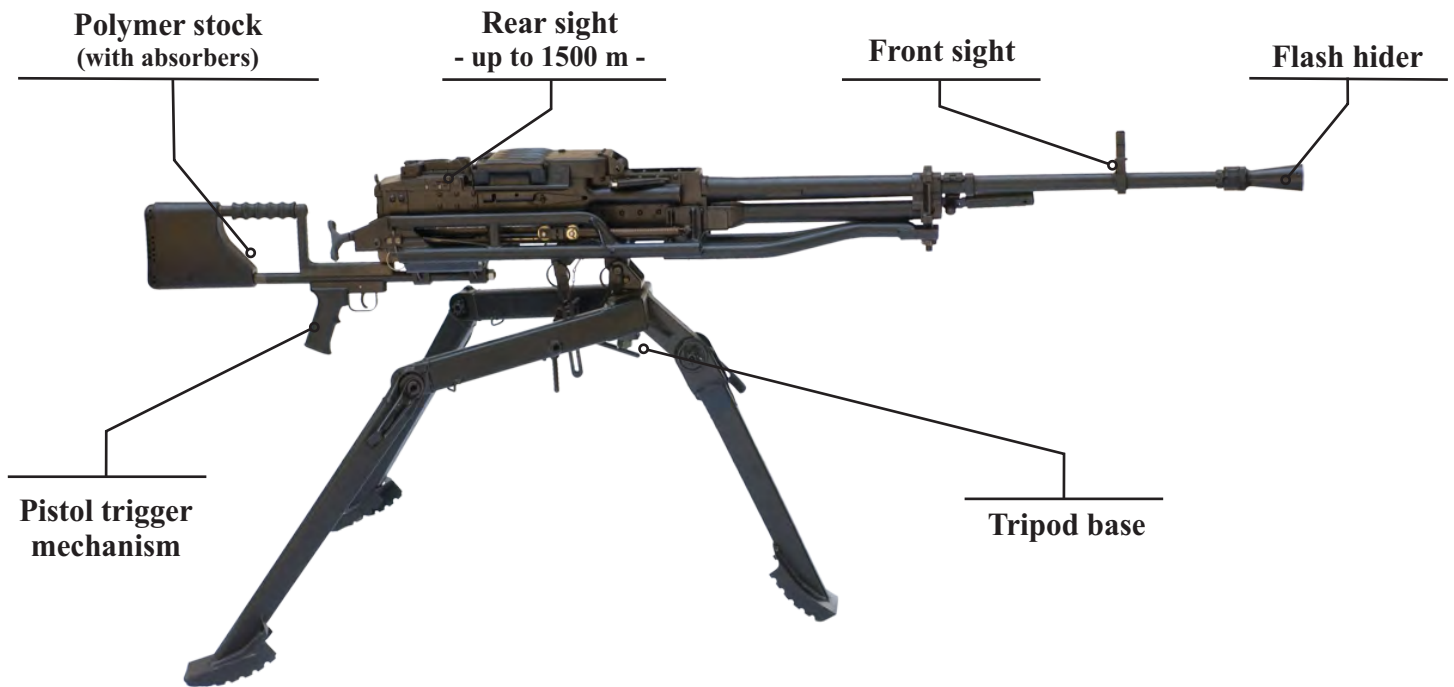

#### Basic tactical and technical characteristics:

| Caliber       | Number of grooves | Twist rate | Barrel length | Weight with tripod | Weight tripod base | Maximum effective range | Rate of fire |
|---------------|-------------------|------------|---------------|--------------------|--------------------|-------------------------|--------------|
| 12,7 x 108 mm | 8                 | 1100 mm    | 1970 mm       | 48,8 kg            | 24 kg              | 1500 m                  | 700 rds/min  |


- Optionally, it is possible to mount an optical sight, which with pistol trigger mechanism and stock with spring absorber allows precise fire on long distance.
- Machine gun is designed with two calibers: 12,7x108 mm and 12,7x99 mm (.50 Browning).
- Machine gun is fed from a belt placed in the ammunition box with the capacity of 60 rounds. After firing, cartridge cases are ejected forward, which increases the safety of the shooter and the crew around him.

#### Complete set:

- Machine gun M02
- Spare barrel
- 36 short belts for 10 cartridges
- 3 ammunition boxes
- Spare parts
- Tools and Accessories
- Handling and maintenance manuals
- Wooden packing case

#### Optionally, the set includes:

- + Optical sight with mount
- + Belt filler




# MMP

## MACHINE GUN

### M86

Machine gun M86 is a licensed gun based on the Soviet machine gun 7,62 mm PKT (Пулемёт Калашникова Танковый). The machine gun is designed for equipping tanks, armored vehicles, helicopters, armored boats and other war materiel.

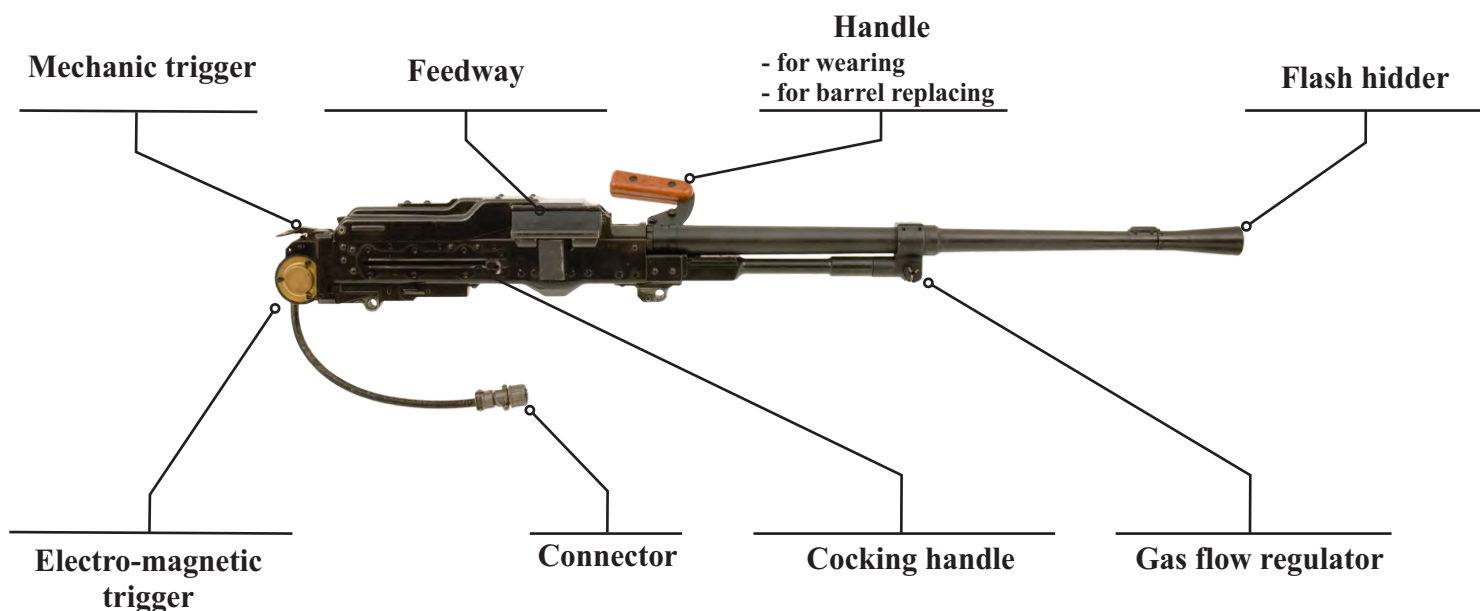

#### Basic tactical and technical characteristics:

| Caliber       | Number of grooves | Barrel length | Weapon length | Weight  | Rounds in belt | Maximum effective range | Rate of fire      |
|---------------|-------------------|---------------|---------------|---------|----------------|-------------------------|-------------------|
| 7,62 x 54R mm | 4                 | 780 mm        | 1100 mm       | 11,6 kg | 250 rds        | 1000 m                  | 700 - 800 rds/min |

#### Complete set:

- Machine gun M86
- Belt for 250 rounds
- Ammunition box for belt (250 rds)
- Spare parts
- Tools
- Accessories
- Handling and maintenance manuals
- Wooden packing case

#### Optionally, the set includes:

- + Spare barrel
- + Belt filler



# MMP

## UNDERBARREL GRENADE LAUNCHER

### BGP 40 mm


**Grenade launcher is a weapon that with great precision creates the explosion effect of a hand grenade at distances characteristic for a thromblone mine.**

**1 - Front sight**

**2 - Rear sight**

**3 - Barrel**

**4 - Mechanic trigger**

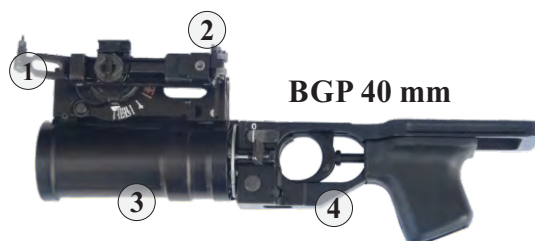

#### **Basic tactical and technical characteristics:**

| Caliber | Number of grooves | Barrel length | Weapon length | Weight | Sight division for direct aiming | Sight division for indirect aiming |
|---------|-------------------|---------------|---------------|--------|----------------------------------|------------------------------------|
| 40 mm   | 4                 | 120 mm        | 323 mm        | 1,5 kg | 50 - 400 m                       | 250 - 350 m                        |

- Model BGP 40 mm M 70 is mounted to assault rifles M70 B1 and M 70 AB2. Model PBG 40 mm is mounted to assault rifles M70 B3, M70 AB3 and all models of M21. Model PBG 40 x 46 mm is mounted to all assault rifles with 12 o'clock and 6 o'clock Picatinny rails on the handguards.
- BGP functions only when it is mounted to an assault rifle; it cannot function on its own.
- This is a muzzle loaded weapon.
- Front and rear iron sight are used for direct aiming and plummet is used for indirect aiming.
- It can fire grenades with anti-personnel, anti-tank, incendiary, smoke and training projectiles.

#### **Complete set:**


- Underbarrel grenade launcher
- Holster
- Bag for grenades
- Barrel cleaning brush
- Rubber buffer for assault rifles with folding stock
- Buffer sling
- Handling and maintenance manuals

# MMP

## AUTOMATIC GRENADE LAUNCHER

### M93

Automatic grenade launcher M93 is an infantry weapon designed for annihilation of covered and uncovered live forces, as well as for destruction of light armored combat means.

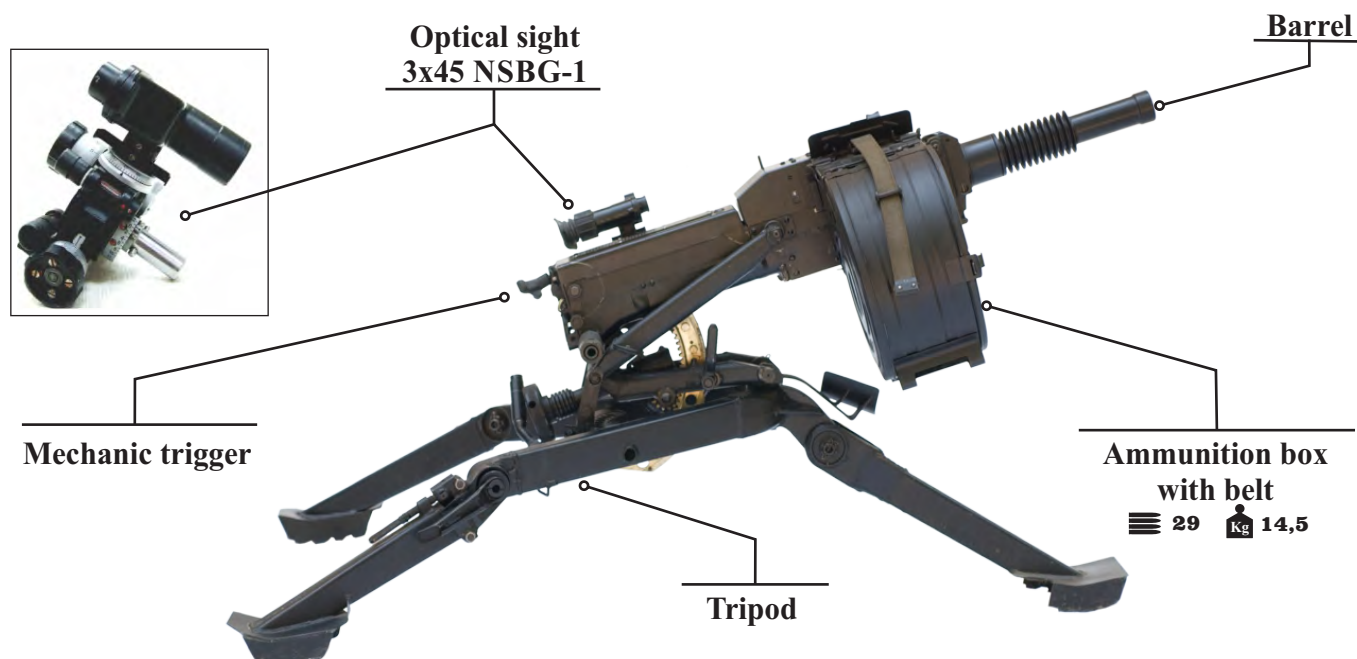

#### Basic tactical and technical characteristics:

| Caliber | Barrel length | Weapon length | Weight with tripod | Weight of tripod | Maximum effective range | Muzzle velocity |
|---------|---------------|---------------|--------------------|------------------|-------------------------|-----------------|
| 30 mm   | 300 mm        | 865 mm        | 38 kg              | 14 kg            | 1700 m                  | 185 m/s         |

- M93 can only fire bursts, with the rate of fire from 50 to 400 grenades per minute.
- The weapon is fed from a 30rd belt with 29 grenades, placed in the ammunition box.
- The launcher can fire grenades with anti-personnel, anti-tank, incendiary, smoke and training projectiles.
- The design of the tripod enables quick change of combat position. Depending on tactical requirements and at the customer's request, the automatic grenade launcher can be mounted to various types of combat vehicles.

#### Complete set:

- Automatic grenade launcher M93
- Tripod
- Aiming device NSBG-1
- 6 ammunition belts
- 3 ammunition boxes
- Tripod sling
- Carrying bag
- Spare parts, tools and accessories
- Handling and maintenance manuals
- Wooden packing case

#### Optionally, the set includes:

+ Belt filler



+ Rectification sight




# MMP

## ROCKET PROPELLED GRENADE LAUNCHER

### RBR7

RBR7 is a modern of version Soviet grenade launcher RPG7, the most used anti-armor weapon in the world. It is designed for usage against hostile armoured vehicles, mechanized troops and against enemy personnel in open space, in tranches and in light field-type shelters.

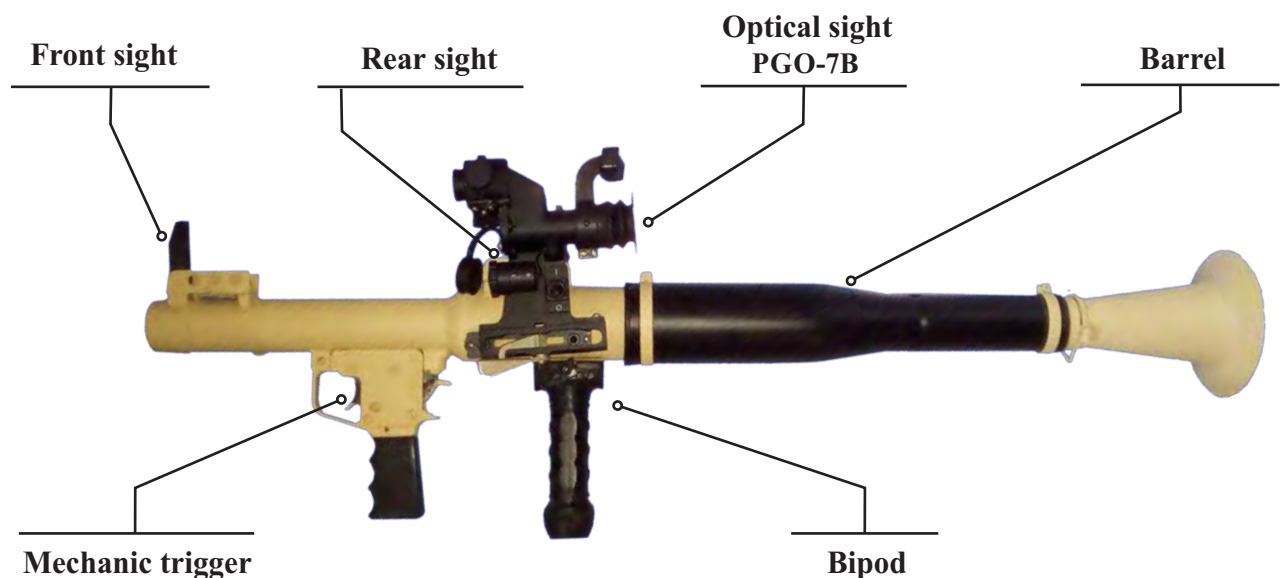

#### Basic tactical and technical characteristics:

| Caliber | Lenght | Weight without grenade | Maximum effective range | Muzzle velocity | Maximum velocity | Rate of fire  |
|---------|--------|------------------------|-------------------------|-----------------|------------------|---------------|
| 40 mm   | 960 mm | 7 kg                   | 500*-2000**m            | 70 - 152 m/s    | 300 m/s          | 4 - 6 rds/min |

- RBR 7 uses standard ammunition of all world manufacturers.
- Effective range of antitank grenade with HEAT warhead is 500\* m.  
Characteristics of the HEAT grenade:
  - armour penetration : 760 mm
  - brick penetration: 2000 mm
  - concrete penetration: 1500 mm.
- Effective range of the grenade fragmentations is 2000\*\* m.
- RBR 7 can fire inside of the buildings, if the walls and other obstacles are at least 2 m away.

#### Complete set:


- Barrel
- Optical sight
- Cleaning kit
- Tools and accessories
- Handling and maintenance manuals

# MMP


## ROCKET PROPELLED GRENADE LAUNCHER

### RPG-22

RPG-22 is a disposable, single shot rocket launcher pre-loaded with fin-stabilized rocket. It is an improved version of the earlier RPG-18 weapon.

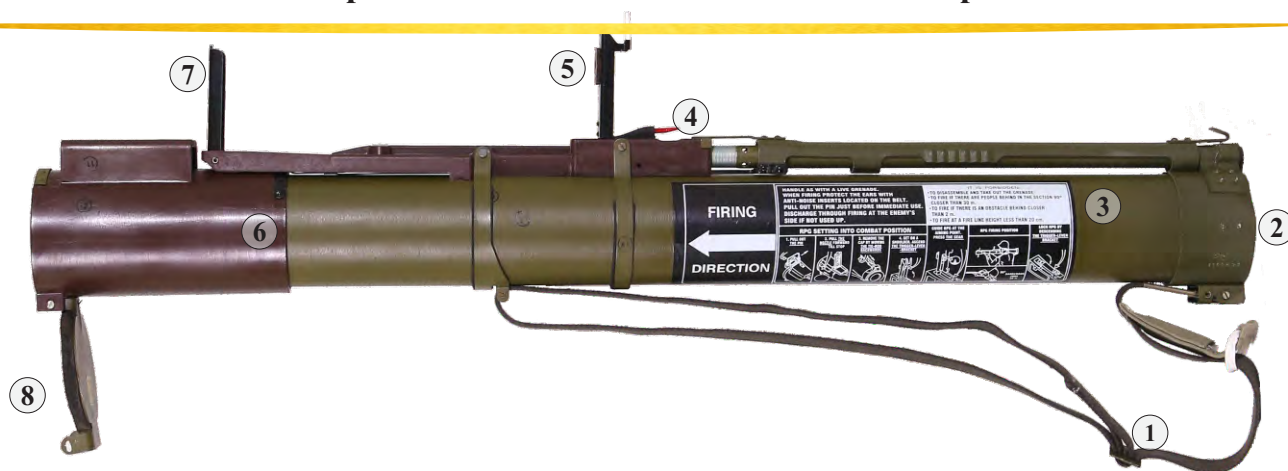

#### PG-22 anti-tank HEAT grenade

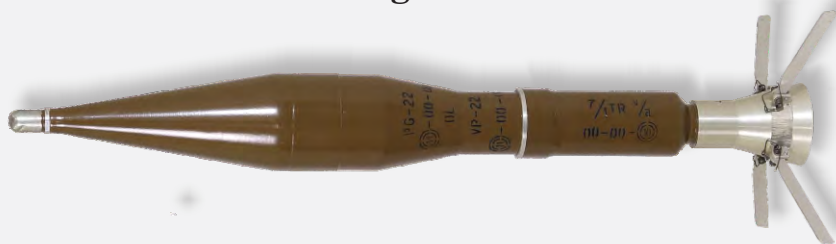

- 1 - Sling
- 2 - Rear cover
- 3 - Main barrel tube (container)
- 4 - Firing mechanism
- 5 - Rear sight
- 6 - Telescoping barrel extension
- 7 - Front sight
- 8 - Front cover

#### Basic tactical and technical characteristics:

| Caliber | Lenght transport/ combat | Weight grenade | Weight | Direct fire range | Maximum effective range | Muzzle velocity | Deployment time |
|---------|--------------------------|----------------|--------|-------------------|-------------------------|-----------------|-----------------|
| 72,3 mm | 785/850 mm               | 1,48 kg        | 2,7 kg | 150 m             | 250 m                   | 133 m/s         | 8 - 10 s        |

- The shaped charge (HEAT) warhead is loaded with 360 g of explosive charge, resulting in armor penetration of up to 400 mm of homogenous steel armor brick penetration - 1000 mm and concrete penetration - 1500 mm.
- RPG22 smoothbore barrel / container is made of two parts, a main tube and a telescoping forward extension, which slides over the barrel, both made of fiberglass.
- The grenade is placed in the barrel tube, and its solid-fuel motor burns out completely within the barrel.
- Since the barrel is open at the rear to avoid recoil, there is a dangerous backblast area behind the firing weapon, at least 15 meters (45 ft) long.

#### Complete set:


- 8 launchers in a case
- Wooden packing case:
  - \* dimensions: 860 x 688 x 364 mm
  - \* gross weight: 48 kg

# MMP

## ROCKET PROPELLED GRENADE LAUNCHER

### ROG-22

ROG-22 rocket fragmentation grenade is an individual disposable weapon and it is intended for defeating the enemy manpower located in the open, in trenches, in field - type shelters, stone, brick and concrete structures, light armored and unarmored vehicles or shelters.

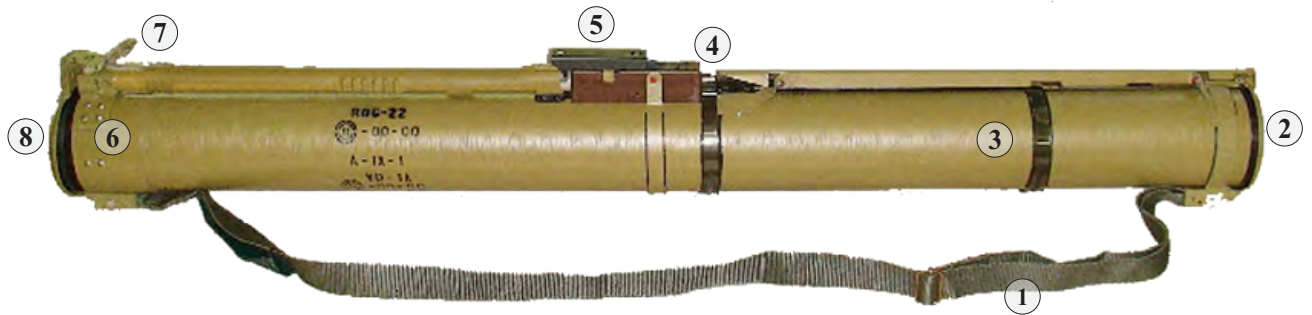

**OG-22 fragmentation grenade**



- 1 - Sling
- 2 - Rear cover
- 3 - Main barrel tube (container)
- 4 - Firing mechanism
- 5 - Rear sight
- 6 - Telescoping barrel extension
- 7 - Front sight
- 8 - Front cover

#### Basic tactical and technical characteristics:

| Caliber | Weight grenade | Weight | Direct fire range | Maximum effective range | Fragmentation effect      | Muzzle velocity | Deployment time |
|---------|----------------|--------|-------------------|-------------------------|---------------------------|-----------------|-----------------|
| 72,3 mm | 2,628 kg       | 4,2 kg | 90 m              | 350 m                   | 864pcs<br>0,9 g fragments | 76 m/s          | 8 - 10 s        |

- OG 22 fragmentation grenade destroys the targets by means of performed fragments filled with powerful high explosive.
- ROG22 smoothbore barrel / container is made of two parts, a main tube and a telescoping forward extension, which slides over the barrel, both made of fiberglass.
- The grenade is placed in the barrel tube, and its solid-fuel motor burns out completely within the barrel.
- Since the barrel is open at the rear to avoid recoil, there is a dangerous backblast area behind the firing weapon, at least 15 meters (45 ft) long.

#### Complete set:


- 6 launchers in a case
- Wooden packing case:
  - \* dimensions: 1020 x 528 x 346 mm
  - \* gross weight: 56 kg

# MMP

## ROCKET PROPELLED GRENADE LAUNCHER

### DRTG-73

**DRTG-73 rocket grenade launcher is a disposable individual weapon and is intended for destroying armored mechanized troops (including ERA-equipped vehicles) as well as enemy manpower in field and urban type fortifications.**

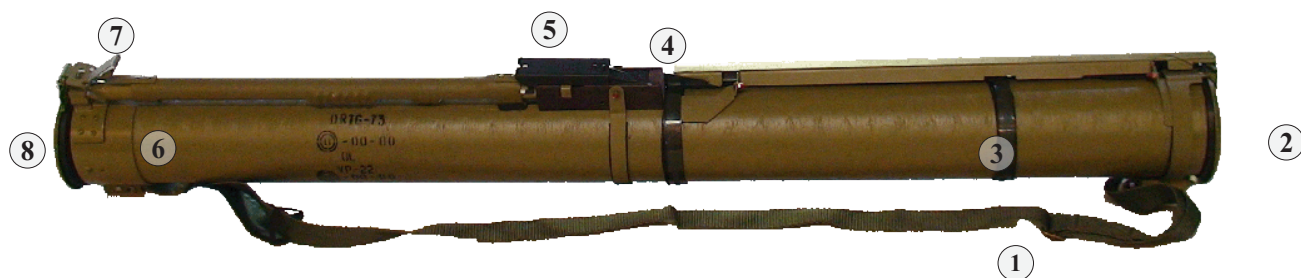

**TG-73 tandem grenade**



- 1 - Sling
- 2 - Rear cover
- 3 - Main barrel tube (container)
- 4 - Firing mechanism
- 5 - Rear sight
- 6 - Telescoping barrel extension
- 7 - Front sight
- 8 - Front cover

#### Basic tactical and technical characteristics:

| Launcher calibre | Caliber main warhead | Caliber precursor warhead | Armor penetration | Muzzle velocity | Direct fire range | Deployment time |
|------------------|----------------------|---------------------------|-------------------|-----------------|-------------------|-----------------|
| 73 mm            | 72,3 mm              | 40 mm                     | 400 mm (+ ERA)    | 120 m/s         | 130 m             | 8 - 10 s        |

- DRTG-73 smoothbore barrel / container is made of two parts, a main tube and a telescoping forward extension, which slides over the barrel, both made of fiberglass.
- The grenade is placed in the barrel tube, and its solid-fuel motor burns out completely within the barrel.
- Since the barrel is open at the rear to avoid recoil, there is a dangerous backblast area behind the firing weapon, at least 15 meters (45 ft) long.

#### Complete set:

- 8 launchers in a case
- Wooden packing case:
  - \* dimensions: 860 x 688 x 346 mm

# MMP

## ANTITANK SYSTEM

### «MALYUTKA»

Antitank system MALYUTKA is formed of wire guided antitank missile installed on a manual (MCLOS) or semiautomatic (SACLOS) guidance. The missile can be launched from the portable launching box or from special launcher adapted for combat vehicles and helicopters.

#### GUIDING DESK

kg 12

Portable manual  
guidance unit  
PO41LV

Wire guided  
antitank missile

Portable launching box  
9P111B1



System adapted for  
combat vehicles and helicopters



#### Basic tactical and technical missile characteristics:

|             | Weight  | Caliber/<br>wingspan | Lenght  | Fly<br>speed | Minimal/<br>maximal<br>range | Penetrating<br>capability<br>up to | Specifics                    |
|-------------|---------|----------------------|---------|--------------|------------------------------|------------------------------------|------------------------------|
| 9M14M       | 10,9 kg | 120 / 393 mm         | 860 mm  | 120 m/s      | 500 - 3000 m                 | 400 mm                             | control: only manual         |
| 9M14MP1     | 11 kg   | 120 / 460 mm         | 865 mm  | 120 m/s      | 500 - 3000 m                 | 460 mm                             | increased penetration        |
| 9M14MP1B1   | 11 kg   | 120 / 460 mm         | 890 mm  | 120 m/s      | 500 - 3000 m                 | 580 mm                             | increased penetration        |
| MALYUTKA 2M | 13,4 kg | 120 / 460 mm         | 1097 mm | 110 m/s      | 500 - 2800m                  | 800 mm                             | increased penetration        |
| MALYUTKA 2T | 13,8 kg | 120 / 460 mm         | 1264 mm | 110 m/s      | 500 - 2800m                  | ERA + 800 mm                       | double (tandem) HEAT warhead |
| MALYUTKA 2F | 13,5 kg | 90 / 460 mm          | 968 mm  | 110 m/s      | 500 - 2800m                  | 8 kg TNT                           | fragmentation warhead        |

#### Complete set:



**Guiding desk**

- Control panel
- Launching knob
- Control lamp
- Switch
- Joystick
- Telescopic sight holder
- Optical sight 9Sh16 8 x 22°
- Battery
- Carrying bag

or

**Wooden box with one missile**



# MMP

## ANTITANK SYSTEM

### 9K111

**9K111 system is formed of wire guided antitank missile installed on semiautomatic guidance. It is designed for destroying visual moving and stationary armored targets, as well as other targets on the ground.**


**9M111-2  
FAGOT**



**9M111-M  
FAKTORIA**



**9K111  
SEMAUTOMATIC GUIDANCE**

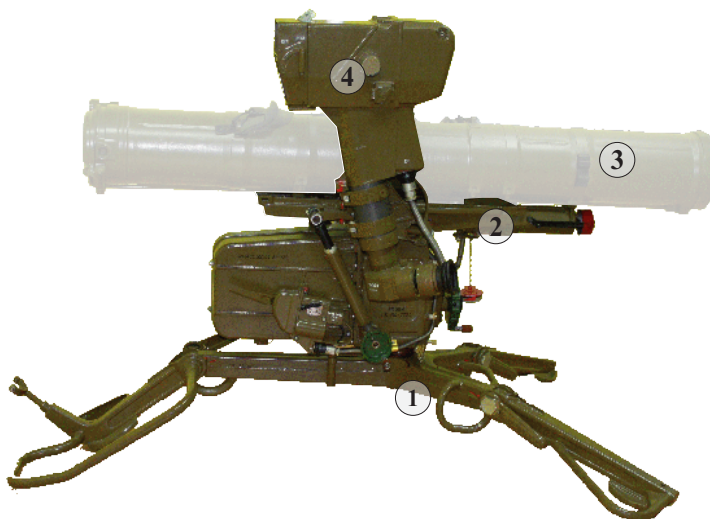

**1 - Tripod 2 - Portable launching units  
3 - Containers with missile 4 - Optical sight**

#### Basic tactical and technical characteristics:

|         | Caliber | Missile weight | Armory penetration | Minimum effective range | Maximum effective range | Average flight speed | Fire rate | Guidance system                |
|---------|---------|----------------|--------------------|-------------------------|-------------------------|----------------------|-----------|--------------------------------|
| 9M111-2 | 120 mm  | 13 kg          | 400 mm             | 70 m                    | 2000 m                  | 186 m/s              | 3 msl/min | semi-automatic/<br>wire-guided |
| 9M111-M |         | 12,9 kg        | 460 mm             | 75 m                    | 2500 m                  | 180 m/s              |           |                                |

- The missiles are launched from portable launching units. For guiding the missile, the task of the gunner is to keep the sight of the launching unit at the target.
- The missile included in the 9K111 system is an effective weapon for all seasons, any type of climatic and weather conditions, including the conditions of dry and wet tropical climate and mountain areas with temperature range from -50° C to +50° C
- It can be launched at dawn and in twilight, and during the night with artificial illumination of the area with the help of standard military illumination facilities.
- Two missiles in containers are placed in one bag. They are water-tight, with good floatability, and are good for river crossing.

#### Complete set:

##### 9M111-2 FAGOT

- 8 launchers in a case
- Wooden packing case:
  - \* dimensions: 1260 x 478 x 322 mm
  - \* gross weight: 57 kg

##### 9M111-M FAKTORIA


- 8 launchers in a case
- Wooden packing case:
  - \* dimensions: 1260 x 478 x 322 mm
  - \* gross weight: 57,5 kg

# MMP

## ANTITANK SYSTEM

### 9K113 KONKURS

9M113 KONKURS is designed for destroying visual moving and stationary armored targets, as well as other targets on the ground. The system is an effective weapon for all conditions and environments.

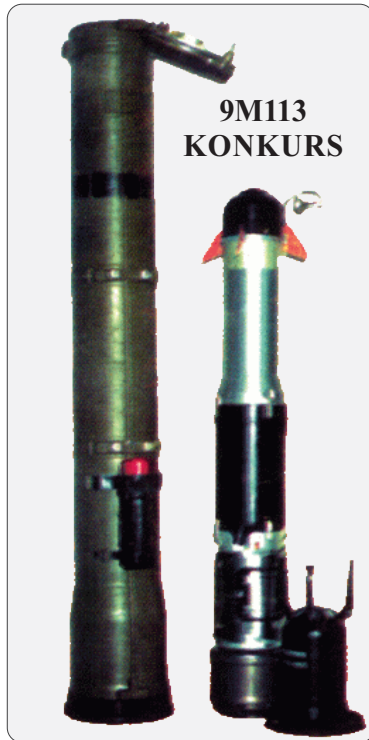

9K111  
SEMIAUTOMATIC GUIDANCE



1 - Tripod 2 - Portable launching units  
3 - Containers with missile 4 - Optical sight

#### Basic tactical and technical characteristics:

| Caliber | Missile weight | Armory penetration | Minimum effective range | Maximum effective range | Average flight speed | Fire rate | Guidance system                |
|---------|----------------|--------------------|-------------------------|-------------------------|----------------------|-----------|--------------------------------|
| 135 mm  | 25,1 kg        | 600 mm             | 75 m                    | 4000 m                  | 208 m/s              | 3 rds/min | Semi-automatic/<br>wire-guided |

- The missiles are launched from portable launching units 9m111. For guiding the missile, the task of the gunner is to keep the sight of the launching unit at the target.
- It is designed for destroying visible moving and stationary armored targets, as well as other targets on the ground.
- It can be launched at dawn and in twilight, and during the night with artificial illumination of the area with the help of standard military illumination facilities.

#### Complete set:

- 1 missile in a case
- Wooden packing case:
  - \* dimensions: 1390 x 272 x 353 mm
  - \* gross weight: 47,9 kg

# MMP

## ANTITANK SYSTEM

### 9K115 METIS

The missile included in the 9K115 system is an effective weapon in all seasons, in any type of climate and weather conditions, including the conditions of dry and wet tropical climate and mountain regions.



- 1 - Tripod
- 2 - Portable launching units
- 3 - Containers with missile
- 4 - Optical sight

#### Basic tactical and technical characteristics:

| Caliber | Missile weight | Armory penetration | Minimum effective range | Maximum effective range | Average flight speed | Fire rate | Guidance system                |
|---------|----------------|--------------------|-------------------------|-------------------------|----------------------|-----------|--------------------------------|
| 93 mm   | 6 kg           | 460 mm             | 150 m                   | 250 m                   | 180 m/s              | 4 rds/min | Semi-automatic/<br>wire-guided |

- The missiles are launched from portable launching units. For guiding the missile, the task of the gunner is to keep the sight of the launching unit at the target.
- It is designed for destroying visible moving and stationary armored targets, as well as other targets on the ground.
- It can be launched at dawn and in twilight, and during the night with artificial illumination of the area with the help of standard military illumination facilities.
- Two missiles in containers are placed in one bag. They are water-tight, with good floatability, and are good for river crossing.

#### Complete set:

- 8 launchers in a case
- Wooden packing case:
  - \* dimensions: 930 x 380 x 436 mm
  - \* gross weight: 45 kg

# MMP

## ROCKET THERMOBARIC GRENADE

### 107 mm FIREBALL

107 mm rocket thermobaric grenade „Fireball” is fitted with a warhead with thermobaric action. Thermobaric weapon is a type of explosive that uses oxygen from the surrounding air to generate a high-temperature explosion and blast wave with longer duration.



- 1 - Sling
- 2 - Rear cover
- 3 - Barrel tube (container)
- 4 - Firing mechanism
- 5 - Optical sight
- 6 - Front cover
- 7 - Handle

**FIREBALL thermobaric grenade**



#### Basic tactical and technical characteristics:

| Caliber | Container length | Grenade and container weight | Direct fire range | Maximum range | Guidance system |
|---------|------------------|------------------------------|-------------------|---------------|-----------------|
| 107 mm  | 900 mm           | 14,5 kg                      | 600 m             | 1800 m        | launcher        |

- The 107 mm rocket thermobaric grenade „Fireball” is fitted with a warhead with thermobaric action and a FMP-1 fuze, which is armed upon grenade launching.
- Upon reaching the target the fuze initiates the dispersing composition which disperses the thermobaric mixture followed by the latter's detonation transformation.
- The warhead must provide an overpressure of not less than 0,2 bar (kg/cm<sup>2</sup>) at a distance of 10 m from the point of burst in open terrain.

#### Complete set:


- 1 launchers in a case
- Fuze FMP-1

# MMP

## AIRCRAFT GUN

### 20/3 M55

The standard towed version of the M55 is designed for infantry use. The M55 consists of three license-produced cannons (Hispano-Suiza HS.804 20 mm L/70) held in place on a single mount and a towed carriage for transportation.

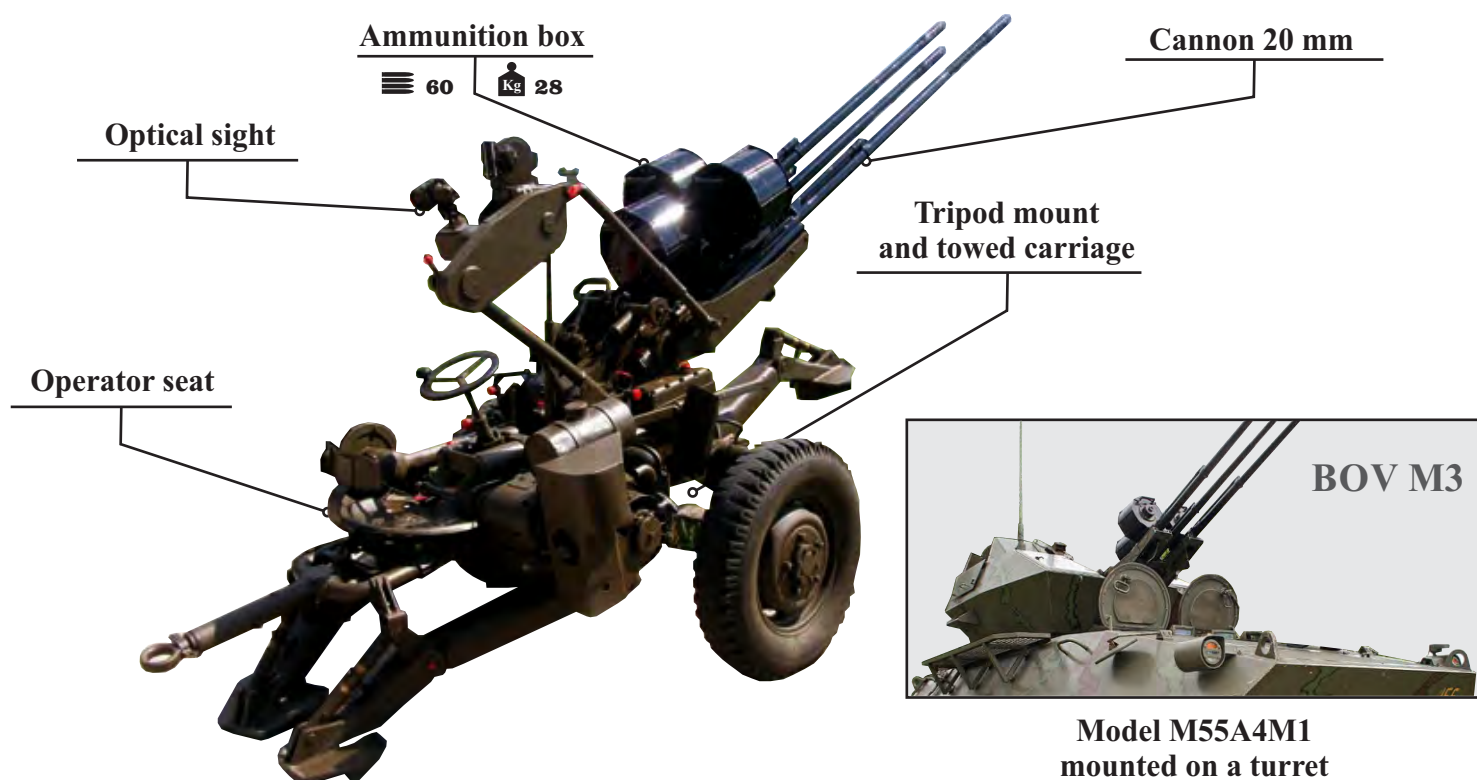

#### Basic tactical and technical characteristics:

| Caliber | Lenght transport position | Weight transport/ combat | Effective range on air/ horizontal | Maximum range horizontal/ vertical | Muzzle velocity | Rate of fire (one cannon) | Elevation/ horizontal field |
|---------|---------------------------|--------------------------|------------------------------------|------------------------------------|-----------------|---------------------------|-----------------------------|
| 20 mm   | 4,3 m                     | 970/1150 kg              | 1200/2000 m                        | 5500/4000 m                        | 835-880 m/s     | 11 rds/s                  | -5° do +83°/<br>360°        |

- Carriage clearance is 230-380 mm (depending on the model). Maximum speed on asphalt road is 70 km/h.
- Ammunition cal. 20x110 mm: M60 armour-piercing grenade pointer/marker, TZO M57 explosive torch cartridge and exercise grenade (M79 and M77)


|                |                                                                                                                                                                                              |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>M55A2B1</b> | - Weapon control is manual with two handrails. Gunner aims with optical-mechanical sight (PANS-20/3) and opens fire with a pedal.                                                            |
| <b>M55A3B1</b> | - The hydraulic directional drive of the gun which is driven by a small gasoline engine «Wankel» to the right of the gunner's seat. Gunner uses joystick for gun control.                    |
| <b>M55A4B1</b> | - Engine is placed under the gunner's seat. New optical sight J-171 is installed. A splinter-proof shield is installed in front of the optical sight and the gunner,                         |
| <b>M55A4M1</b> | - A modified A4 B1 system upgraded with the Galileo J171 ballistic computer, mounted on a turret installed in the top roof of a BOV armoured personnel carrier.                              |
| <b>M71/08</b>  | - This version is installed on ships. Cannons and ammunition box (mounted beneath the the cannon bottom) are positioned so that the mount and the cartridge collector protect against water. |

# MMP

## AIRCRAFT GUN

### ZU 23/2

ZU 23/2 is designed to engage towards low-flying targets and armored vehicles. The main purpose of this weapon is direct defense of troops and strategic locations against air assault usually conducted by helicopters and low-flying airplanes.

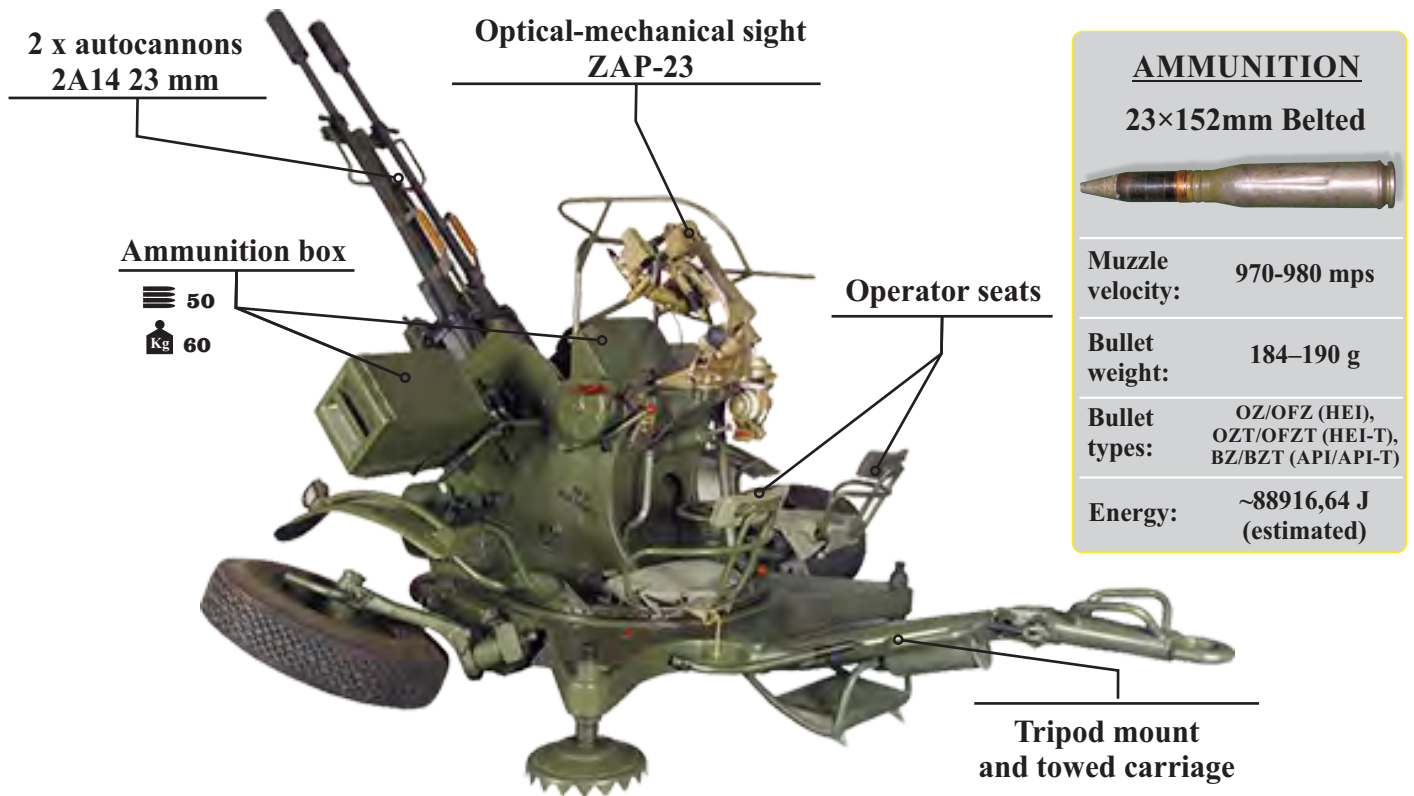


#### Basic tactical and technical characteristics:

| Caliber | Lenght | Weight | Barrel length | Rate of fire<br>cyclic/practical | Effective range<br>on air/<br>horizontal | Elevation/<br>horizontal<br>field | Number<br>of<br>operators |
|---------|--------|--------|---------------|----------------------------------|------------------------------------------|-----------------------------------|---------------------------|
| 23 mm   | 4,57 m | 950 kg | 2.008 m       | 2000/400<br>rds/m                | 2500/2000 m                              | -10° do +90°/<br>360°             | 6                         |

- ZU 23/2 can be prepared for firing from the march position in 30 seconds and in emergency can be fired from the travelling position.
- The weapon is aimed and fired manually, with the help of the optical-mechanical sight which uses manually entered target data to provide limited automatic aiming. It also has a straight-tube telescope T-3 for use against ground targets such as infantry as well as unarmored or lightly armored vehicles.
- Normally, once each barrel has fired 100 rounds it becomes too hot and is therefore replaced with a spare barrel. Each weapon is normally provided with two replacement barrels as part of its standard equipment.

#### Some modifications:

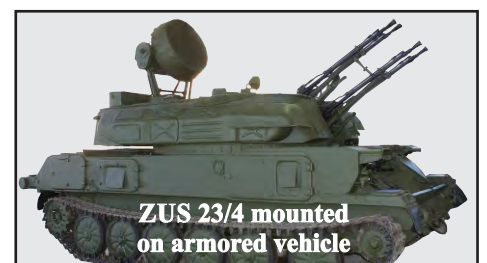


# MMP

## RECOILLESS GUN

### M60

**Recoilless gun M60 was developed in the 1960s, primarily as an infantry anti-tank weapon. It can not break through modern armors, but is still very much present primarily because of its high precision.**

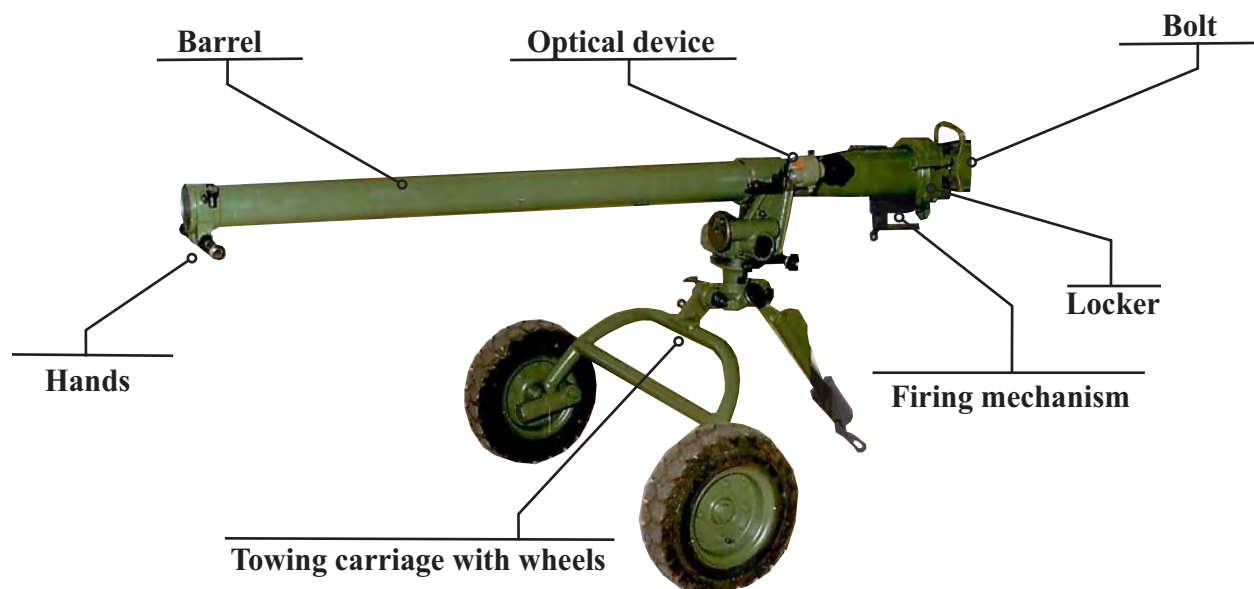

#### **Basic tactical and technical characteristics:**

| Caliber | Weight transport/ combat | Traverse | Elevation     | Effective firing range | Maximum firing range | Optical device   | Number of operators |
|---------|--------------------------|----------|---------------|------------------------|----------------------|------------------|---------------------|
| 81,8 mm | 123 / 120 kg             | 360°     | -20° do + 35° | 500 m                  | 4500 m               | NS M60 or NS M74 | 5                   |

- M60 ammunition types: HEAT (M60P2R - penetration 220 mm), reactive-HEAT (M72 - penetration 300 mm), reactive-HEAT (M91 - penetration 400 mm) and fragmentation warhead for anti-personnel warfare (M93).
- Direct fire is limited to 1500 meters against stationary targets and 1000 meters against moving targets.
- It has a possibility for mounting passive sighting device PN 5x80.
- Model M60A has wheels stuffed with “spongy matter” and mounted absorber on towing carriage.

#### **Complete set:**

- Recoilless gun M60
- Optical device
- Spare parts
- Tools
- Accessories
- Handling and maintenance manuals

# MMP

## MORTAR

### 60 mm

**Mortar caliber 60 mm is designed to provide a lighter-weight alternative to company-level fire support on short ranges.**


**1 - Barrel**

**2 - Base plate**

**3 - Sight bracket**

**4 - Barrel collar**

**5 - Bipod**

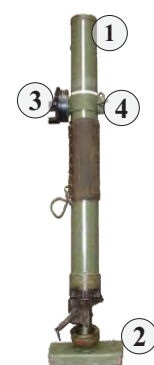

### Basic tactical and technical characteristics:

|      | Caliber  | Length of barrel with breech piece | Weight in combat position | Elevation | Horizontal field of action               | Maximum barrel pressure | Maximum/minimum range | Sight device | Number of operators |
|------|----------|------------------------------------|---------------------------|-----------|------------------------------------------|-------------------------|-----------------------|--------------|---------------------|
| M57  | 60,75 mm | 725 mm                             | 18,5 kg                   | 45° - 85° | without shifting of bipod<br>L 3° - D 3° | 422 bar                 | 2537 / 74 m           | NSB-3; NSB-1 | 3                   |
| M60  |          | 1366 mm                            | 13,5 kg                   | 45° - 85° | with shifting of bipod<br>360°           | 650 bar                 | 5200 / 120 m          | NSB-1        | 3                   |
| M60C |          | 780 mm                             | 9 kg                      | -5° - 85° |                                          | 250 bar                 | 1600 / 85 m           | mehanička    | 2                   |

- The basic characteristics of light mortars with 60 mm caliber: fire power, portability, short time for the transition to the combat position and high precision.
- Base plate design allows: acting from hard surfaces, shallow burial on soft soil and easy movement after the end of the fire.
- The firing pin is fixed in the base cap of the tube, and the grenade is fired automatically when it is dropped down the barrel.

### Complete set:


- Barrel
- Base plate
- Bipod
- Backing frames for: barrel, bipod, base plate and ammunition boxes
- Spare parts
- Tools and accessories
- Handling and maintenance manuals
- Wooden packing case

# MMP

## MORTAR

### 82 mm

Mortar caliber 82 mm is a medium-weight mortar. It is a smooth-bore, muzzle-loading, high-angle-of-fire weapon used for long-range indirect fire support to light infantry, air assault, and airborne units across the entire front of a battalion zone of influence.

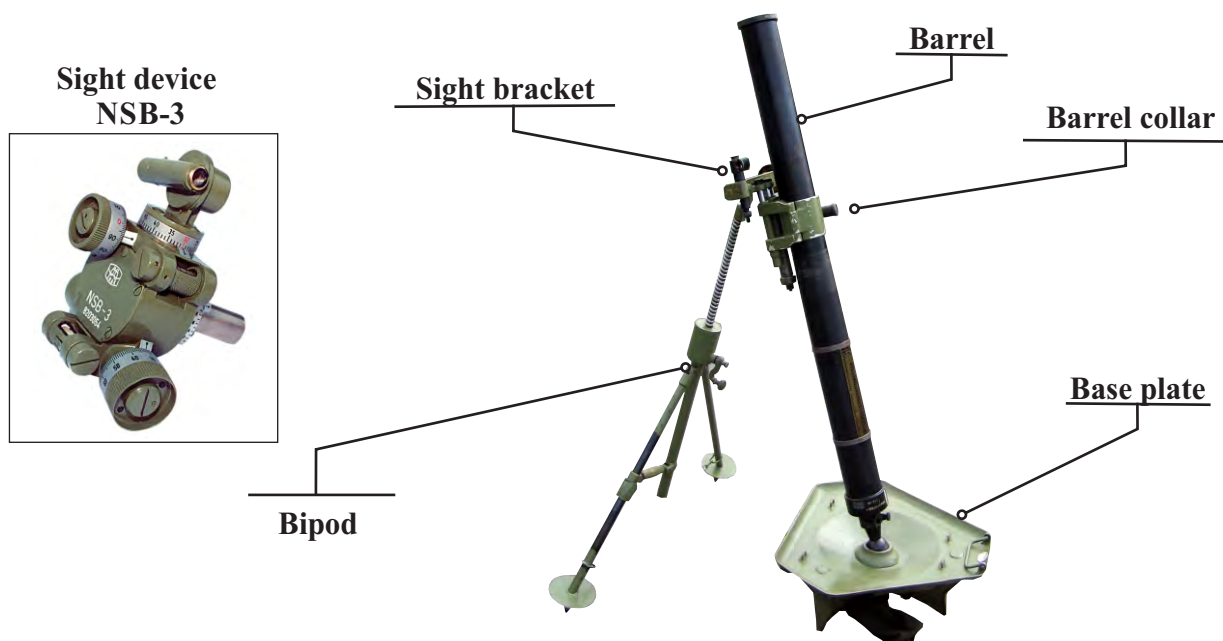

#### Basic tactical and technical characteristics:

|         | Caliber  | Lenght of barrel with breech piece | Weight in combat position | Elevation | Horizontal field of action                                                 | Maximum barrel pressure | Maximum/minimum range | Sight device | Number of operators |
|---------|----------|------------------------------------|---------------------------|-----------|----------------------------------------------------------------------------|-------------------------|-----------------------|--------------|---------------------|
| M69A    | 82,14 mm | 1374 mm                            | 45 kg                     | 45° - 85° | without shifting of bipod<br>L 3° - D 3°<br>with shifting of bipod<br>360° | 640 bar                 | 6500* / 85 m          | NSB-3        | 4                   |
| BR-2-57 | 81,4 mm  | 1324 mm                            |                           |           |                                                                            | 610 bar                 | 4900 / 88 m           |              |                     |

\* Modern ammunition developed for mortar 81mm enables action fire over 6000 m distance.

- Mortar 82 mm is transported by motor vehicles. On short distances, in combat conditions, it is transported by operators (manually or with backing frames)

#### Complete set:

- Barrel
- Base plate
- Bipod
- Aiming stakes
- Backing frames for: barrel, bipod, base plate and ammunition boxes
- Spare parts
- Tools and accessories
- Handling and maintenance manuals
- Wooden packing case



# MMP

## MORTAR

### 120 mm

Mortar 120 mm is a light-weight weapon for infantry close support, designed for annihilation of manpower and destroying the firing points by short fire. It is particularly effective on intersected and hilly terrains, where the enemy may be hidden by a rear slope.

1 - Barrel



2 - Base plate

3 - Trailer

4 - Bipod with barrel collar



Sight device  
NSB-4B

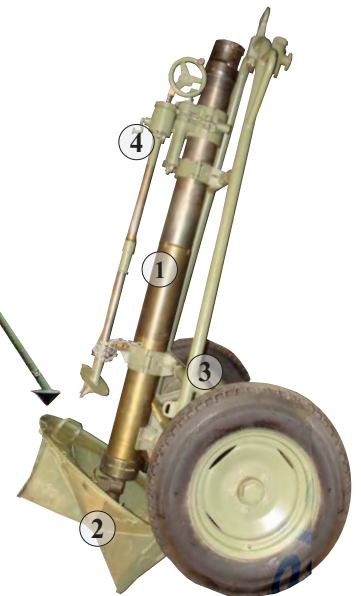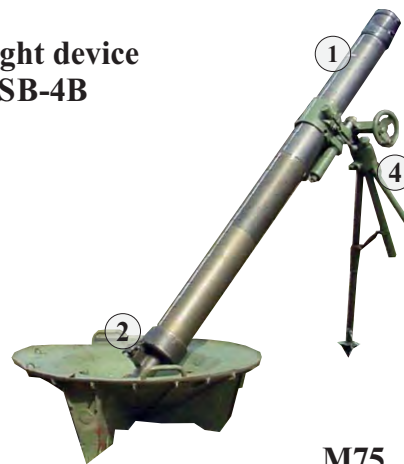

### Basic tactical and technical characteristics:

|     | Caliber | Lenght of barrel with breech piece | Weight in combat position | Elevation | Horizontal field of action                                                 | Maximum barrel pressure | Maximum/minimum range            | Sight device | Number of operators |
|-----|---------|------------------------------------|---------------------------|-----------|----------------------------------------------------------------------------|-------------------------|----------------------------------|--------------|---------------------|
| M74 | 120 mm  | 1692 mm                            | 207 / 110 kg              | 45° - 85° | without shifting of bipod<br>L 3° - D 3°<br>with shifting of bipod<br>360° | 835 bar                 | 6500 / 297 m<br><del>*9400</del> | NSB-4B       | 4+1                 |
| M75 |         | 1690 mm                            | 261 / 168 kg              |           |                                                                            |                         |                                  |              |                     |

\* Modern ammunition developed for mortar 81mm enables action fire distance over 9000 m.

- Mortar 120 mm is transported by vehicles, witch increases the operators number by 1 - a driver. In combat, he has a role of ammunition assistant. In combat conditions, on short distances, the mortar is transported by operators (manually or by backing frames).

### Complete set:

- Barrel
- Base plate
- Bipod
- Aiming stakes
- Backing frames for: barrel, bipod, base plate and ammunition boxes
- Spare parts
- Tools and accessories
- Handling and maintenance manuals
- Wooden packing case




# EXPLOSIVES and AMMUNITIONS

# MMP

## OCTOGEN

### HMX

**Octogen (HMX) is used exclusively for military purposes to implode fissionable material in nuclear devices, as a component of plastic-bonded explosives, as a component of rocket propellant, and as a high explosive buster charge.**

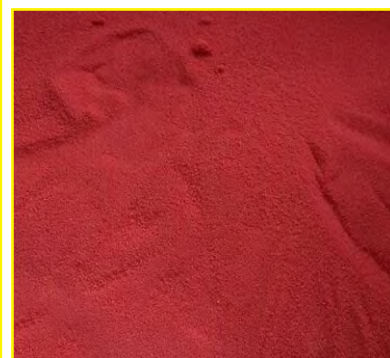

| CHARACTERISTIC        |                         | TECHNICAL SPECIFICATION             |             | TNT / HNS                        |                                            |
|-----------------------|-------------------------|-------------------------------------|-------------|----------------------------------|--------------------------------------------|
| Crystal Density:      | 1,908 g/cm <sup>3</sup> | Content of HMX (m/m) min:           | 98 %        | TNT content:                     | +0,7 / 98,9 / -1,7 %                       |
| Detonation Velocity:  | 9,1 m/s                 | Content of RDX max:                 | 2 %         | HNS content:                     | +1,5 / 0,5 / -0,3 %                        |
| Oxygen Balance:       | -21,6 %                 | Insoluble in Acetone max:           | 0,05 %      | Addition agent content           | +0,2 / 0,6 / -0,4 %                        |
| Heat of Explosion:    | 6,192 kJ/kg             | Melting Point min:                  | 277 °C      | Exudation test:                  | without exudation in progres 7 day on 70°C |
| Impact Sensitivity:   | 7,4 N/m                 | Content of Ash max:                 | 0,03 %      | Moisture content:                | 0,1 %                                      |
| Friction Sensitivity: | 120 N                   | Acidity as CH <sub>3</sub> COOH max | 0,02 %      | Content volatile oxidize matter: | Must content test relative to examination  |
|                       |                         | Particle Size:                      | large range |                                  |                                            |

- Octogen (HMX), Cyclotetramethylenetetranitroamine, C<sub>4</sub>H<sub>8</sub>N<sub>8</sub>O<sub>8</sub>. Appearance and Color: Crystalline white powder, without mechanical impurities.
- HMX appears in four modifications, of which only the β-modification displays a particularly high density and hence also a particularly fast detonation rate. Basic application of pure HMX is in the production of detonating cords and shock tubes which are thermally stable in temperatures up to 300° C.
- Phelgmatised HMX is used in the production of explosive charges for anti-aircraft missile projectiles, anti-tank rockets and artillery projectiles with explosive and cumulative effect as well as for oil well perforating charges. A mixture of HMX and a polymer adhesive, known as PBX, is used in the production of a new generation of cumulative rocket projectiles, the so-called insensitive munitions.

**In the field of high explosives for defense, the technology transfer for the batch production of HMX / RDX can be offered, based on a turnkey system.**

# MMP

## HEXOGEN

### RDX

Hexogen (RDX) has a high degree of stability in storage and is considered the most powerful and brisant of the military high explosives. Hexogen can be used alone as a base charge for detonators or mixed with another explosive such as TNT, which produce a bursting charge for aerial bombs, mines, and torpedoes or as an ingredient in plastic bonded explosives.



#### CHARACTERISTIC

|                       |                         |
|-----------------------|-------------------------|
| Crystal Density:      | 1,816 g/cm <sup>3</sup> |
| Detonation Velocity:  | 8,75 m/s                |
| Oxygen Balance:       | -21,6 %                 |
| Heat of Explosion:    | 5,723 kJ/kg             |
| Impact Sensitivity:   | 7,5 N/m                 |
| Friction Sensitivity: | 120 N                   |

#### TECHNICAL SPECIFICATION

|                                      | TYPE 1      | TYPE 2   |
|--------------------------------------|-------------|----------|
| Melting Point min:                   | 200 °C      | 190 °C   |
| Insoluble in acetone max:            | 0,05 %      | 0,05 %   |
| Content of Ash max:                  | 0.03 %      | 0.03 %   |
| Acidity as HNO <sub>3</sub> max:     | 0,05 %      |          |
| Acidity as CH <sub>3</sub> COOH max: |             | 0,02 %   |
| Content of HMX:<br>(β-modification)  | 0 - 5 %     | 4 - 17 % |
| Particle Size (granulation):         | large range |          |

#### COMPOSITION BASE ON HMX

| Product                                                     | Ingredients      | Content<br>% (m/m) |
|-------------------------------------------------------------|------------------|--------------------|
| FH-5 (A-IX-1; ГЕКФОЛ-5,5)                                   | RDX/Wax          | 95,5/4,5           |
| FH-2,5                                                      | RDX/Wax          | 97,5/2,5           |
| RDX/Wax/Graphite (OWC)                                      | RDX/Wax/Graphite | 94,5/4,5/1,0       |
| RDX/Wax/Graphite (OWC)<br>*for oil well perforating charges | RDX/Wax/Graphite | 98,5/1,0/0,5       |
| Composition B                                               | RDX/TNT/Wax      | 59,5/39,5/1,0      |
| Coposition A-3   A-4                                        | RDX/Wax          | 91/9   97/3        |
| Composition A-5                                             | RDX/Stearic Acid | 98,5/1,5           |

- Due to high volatility pure RDX is used for detonators, amplifiers and transporters and, as a composite with TNT and wax, for casting and pressing of warheads, artillery munitions and missile assets. RDX is phelgmatised by various phelgmatiser types to increase resistance to impact and friction.
- As a military explosive, RDX can be used alone as a base charge for detonators or mixed with another explosive such as TNT to form cyclotols, witch produce a bursting charge for aerial bombs, mines and torpedoes. Common military uses of RDX have been as an ingredient in plastic bonded explosives. Civilian application of RDX include use in pyrotehnics (cap-relay, cutting cords, detonators)

**In the field of high explosives for defense, the technology transfer for the batch production of RDX can be offered, based on a turnkey system.**

# MMP

## TRINITROTOULENE

### TNT

Trinitrotoluene (TNT) is by far the most important explosive for blasting charges of all weapons. Military grade TNT is widely used as a bursting charge for high explosive shells, aircraft bombs, grenades, naval mines and etc. It is also used in boosters, detonators, demolition charges and as an ingredient in slurries and for mining industries.



| CHARACTERISTIC        |                         | TECHNICAL SPECIFICATION                        |             | COMPOSITION BASE ON HMX                                                    |                  |                 |
|-----------------------|-------------------------|------------------------------------------------|-------------|----------------------------------------------------------------------------|------------------|-----------------|
| Crystal Density:      | 1,654 g/cm <sup>3</sup> | Solidification Point min:                      | 80,2 °C     | Product                                                                    | Ingredients      | Content % (m/m) |
| Detonation Velocity:  | 6,9 m/s                 | Content of Moisture max:                       | 0,1 %       | FO-4,5                                                                     | HMX/Wax          | 95,5/4,5        |
| Oxygen Balance:       | -73,9 %                 | Insoluble in Benzene max:                      | 0,05 %      | FO-3,5 (OKΦO.I-3,5)                                                        | HMX/Wax          | 9,65/3,5        |
| Heat of Explosion:    | 4,519 kJ/kg             | Acidity as H <sub>2</sub> SO <sub>4</sub> max: | 0,01 %      | HMX/Wax/Graphite (OWC)                                                     | HMX/Wax/Graphite | 94,5/4,5/1,0    |
| Impact Sensitivity:   | 15 N/m                  | Alkalinity:                                    | not allowed | HMX/Wax/Graphite (OWC)<br><small>*for oil well perforating charges</small> | HMX/Wax/Graphite | 98,5/1,0/0,5    |
| Friction Sensitivity: | 353 N                   | Tetranitromethane:                             | not allowed | Octol 70/30   75/25                                                        | HMX/TNT          | 70/30   75/25   |
|                       |                         | Nitrates (Nitric Acid):                        | not allowed | LX-14                                                                      | HMX/Estane       | 95/5            |

- Trinitrotoulene (TNT) C<sub>7</sub>H<sub>5</sub>N<sub>3</sub>O<sub>6</sub>. Appearance and Color: pale yellow to dark brown flake, without mechanical impurities.
- TNT is widely used, especially in military industry. Most often it is used in the production of artillery munitions, anti-personnel and anti-tank mines, air grenades, hand grenades and the other kinds of explosive mines, but also in the production of industrial explosives and detonators.
- TNT is by far the most important explosive for blasting charges of all weapons. Either alone or mixed in given proportions with other high explosives such as HMX to form octol, RDX to form hexotol, hexogen and aluminium to form hexotonal, PETN to form pentolite, etc. A mixture of TNT and HNS, known as TNT/HNS improved the fine crystalline phase and prevents from the formation of cracks. It is used in tank and artillery munitions shaped charges, bombs, etc.

**In the field of high explosives for defense, the technology transfer for the batch production of RDX can be offered, based on a turnkey system.**

# MMP

## HAND GRENADE

Hand grenades are designed for defensive and offensive actions in close combat. They act through shock wave and steel balls. After activation, they can explode in water, in snow, and in mud.

1 - Body    2 - Explosive charge    3 - Fuse    4 - Detonator    5 - Safety ring with pin    6 - Lever





M75



M84

### Basic tactical and technical characteristics:

|     | Weight | Dimesions     | Explosive charge | Body                     | Steel balls radius | Pulling force of safety element | Safety angle of declination of fuze lever | Time delay | Use in temperature range |
|-----|--------|---------------|------------------|--------------------------|--------------------|---------------------------------|-------------------------------------------|------------|--------------------------|
| M75 | 355 g  | Ø 57 x 89 mm  | 36 g             | plastic with steel balls | Ø 2,5-2,9 mm       | 7-18 kg                         | min 35°                                   | 3 - 4,4 s  | -30° C to +60° C         |
| M84 | 480 g  | Ø 60 x 115 mm | 95 g             |                          | Ø 2 -2,3 mm        | 11,2 kg                         | min 50°                                   | 3 - 5,7 s  |                          |

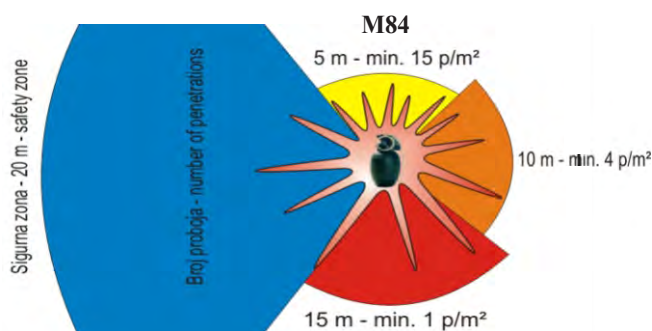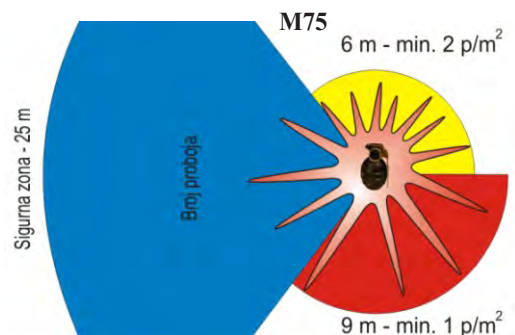

### Complete set:

- 1 hand grenade in plastic box
- 30 plastic box in wooden packing case
- Wooden case:
  - \* dimensions: 130 x 380 x 630 mm
  - \* gross weight: 20 kg

Plastic box




# MMP

## ANTI-PERSONNEL MINE

### MRUD

**MRUD (Mina Rasprskavajuća Usmerenog Dejstva)** is a plastic bodied, convex rectangular directional type of anti-personnel mine designed to wound or kill by fragmentation. The body of the MRUD is waterproof and it can explode in all conditions and environments.

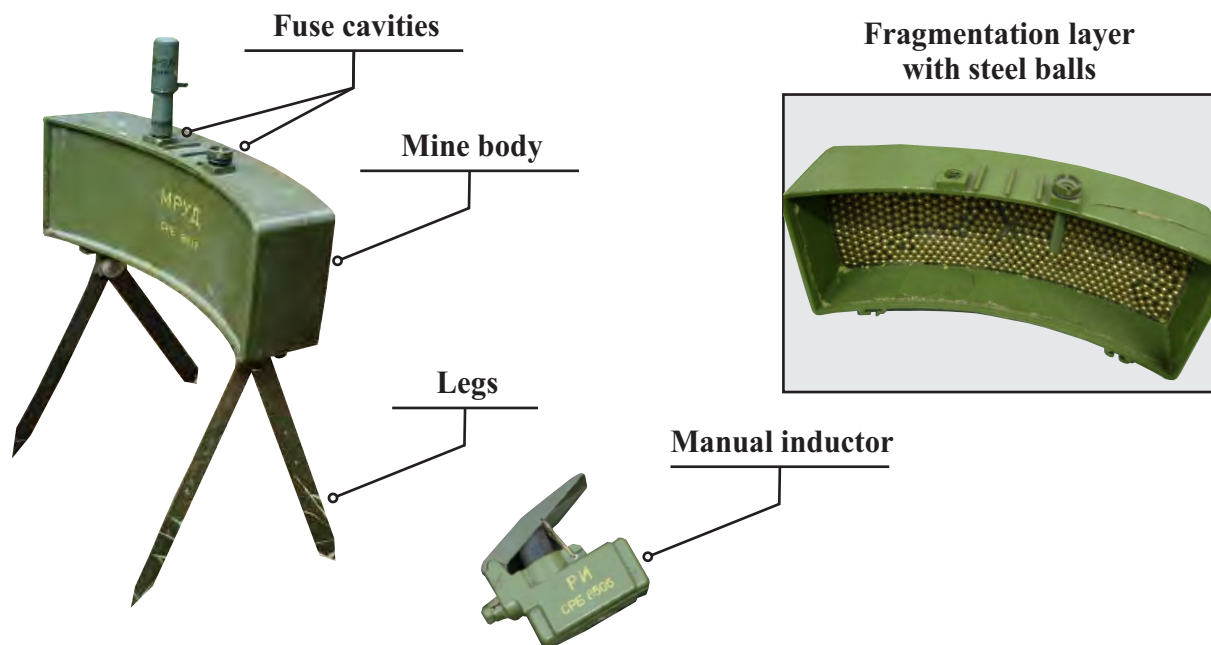

#### Basic tactical and technical characteristics:

| Weight | Explosive charge | Dimension    | Effect        | Fragmentation layer                | Field effect/<br>(horizontal/<br>vertical)<br>Range | Use in<br>temperature<br>range |
|--------|------------------|--------------|---------------|------------------------------------|-----------------------------------------------------|--------------------------------|
| 1,5 kg | 900 g TNT        | 230x89x50 mm | Fragmentation | steel balls<br>650 pcs<br>ø 5,5 mm | ∠ 60° / 3°<br>up to 50 m                            | od -30° C<br>do +50° C         |

- The mine can be remotely detonated using a manual inductor or another electrical power source connected to electric detonator EK-40-69 with wire (up to 30 meters away).
  - The fuse cavities also accept any booby trap fuse with an M10 x 1 mm:
    - UMP-1 (mechanical pull)
    - UMP-2 (mechanical pull)
    - UMNOP - multi-function fuse (mechanical pull/pressure)
- \* It can be detonated with other explosive charge (mine, granade etc.)

#### Complete set:

- 10 mines set in wooden packing case

##### Mine set:

- mine body
- 2 pair of legs
- manual inductor (RI)
- 2 electric detonator (EK-40-69)
- miners wire (length 30 m)
- controle device
- bag



# MMP

## ANTI-TANK MINES



### CHARACTERISTICS

| Description                    | ANTIMAGNETIC ANTI-TANK MINE                 | ANTI-TANK DESTRUCTIVE PIERCING MINE                      |
|--------------------------------|---------------------------------------------|----------------------------------------------------------|
| Dimensions                     | Ø 285 x 110 mm                              | Ø 290 x 132 mm                                           |
| Weight                         | 6,3 kg                                      | 7,2 kg                                                   |
| Explosive charge               | 5,5 kg Cast TNT                             | 5,1 kg Cast TNT                                          |
| Way of initiation              | Through a fuze                              | Through a fuze                                           |
| Fuze arming (time)             |                                             | 1 or 4 minutes                                           |
| Stepping on area               | Ø 200 mm (314 cm <sup>2</sup> )             | 214 cm <sup>2</sup>                                      |
| Way of fuze activation         | through a fuze                              | through a lever / by stepping on a mine plate            |
| Activation force (daN)         | 100 - 200 daN                               | through a lever 1,3 - 1,7 daN / by stepping 150 -350 daN |
| Piercing action                |                                             | 40 mm steel plate from the distance of 800 mm            |
| Functions in temperature range | - 30°C to - 60°C                            | - 30°C to - 60°C                                         |
| Airtightness (waterproof)      | to 0,2 bars                                 | to 0,2 bars                                              |
| Way of setting                 | manually / by mine-layer                    | - manually<br>- by mine-layer PMR-3b                     |
| Stability in mine field .      | 6 months in the most unfavorable conditions | 6 months in the most unfavorable conditions              |
| Resistance to air impact wave  | to 3 bars                                   | to 3 daN/cm <sup>2</sup>                                 |

### PACKING

|                    |                          |                         |
|--------------------|--------------------------|-------------------------|
| Way of packing     | 4 mines in a barrel      | 4 mines in a wooden box |
| Package dimensions | Ø 330 x 370 mm (0.032 m) | 330 x 650 x 330 mm      |
| Gross weight       | 28 kg                    | 43 kg                   |
| Storage time       | 20 years                 | 15 years                |

# MMP

## AMMUNITION

### 9 x 19 mm



### CHARACTERISTICS

|                   |                       |
|-------------------|-----------------------|
| Bullet length     | 29,69mm               |
| Bullet weight     | ~ 12,53 g             |
| Projectile length | 15,8 mm               |
| Projectile weight | ~ 0,8 g               |
| Propellant charge | ~ 0,4 g               |
| Muzzle velocity   | 370 ± 10 m/s          |
| Accuracy Rs       | max 3,8 cm<br>at 50 m |

- **Projectil material:** Jacket – Tombac CuZn10, Core – Lead antimony
- **Proppelling charge:** Smokeless, single base, flake powder

### PACKING

#### PACKAGE 2

- 50 rounds in cardboard box
- 20 cardboard boxes (1000 rounds) in metal box M2A1
- 2 metal boxes (2000 rounds) in wire bound wooden box

# MMP

## AMMUNITION

### 5,56 x 45 mm

M193  
(Ball)

M196  
(Tracer)

M855  
(Ball)

M856  
(Tracer)



### CHARACTERISTICS

|                     |                         |                         |                       |                         |
|---------------------|-------------------------|-------------------------|-----------------------|-------------------------|
| Bullet lenght       | 57,4 mm                 | 57,4 mm                 | 57,4 mm               | 57,4 mm                 |
| Bullet weight       | ~ 11,5 g                | ~ 11,5 g                | ~ 11,9 g              | ~ 11,8 g                |
| Projectile weight   | 3,56 g                  | 3,5 g                   | 4 g                   | 3,92 g                  |
| Projectile lenght   | 19,7 mm                 | 23,2 mm                 | 23,4 mm               | 28,45 mm                |
| Propellant charge   | ~ 1,64 g                | ~1,69 g                 | ~1,6 g                | ~1,36 g                 |
| Muzzle velocity     | 965 ± 12 m/s            | 950 ± 12 m/s            | 920 ± 12 m/s          | 917±12 m/s              |
| Accuracy Rs         | max 5,08 cm<br>at 183 m | max 12,7 cm<br>at 183 m | max 25 cm<br>at 549 m | max 37,8 cm<br>at 549 m |
| Tracer burning time |                         | 69 to max 457 m         |                       | 70 to min 900 m         |

- **Penetration (M855/SS109):** the bullet of the sample cartridges shall demonstrate complete penetration of 3.429 mm thickness AISI 1010 to 1020 steel plate target with hardness between min. RB55 and max. Rb70 positioned at  $0^{\circ} \pm 5^{\circ}$  obliquity and located 600 meters from the weapon.

### PACKING

#### PACKAGE 1

- 20 rounds in cardboard box
- 50 cardboard boxes in metal box M2A1
- 2 metal boxes (2000 rounds) in wire bound wooden box

#### PACKAGE 2

- 20 rounds in cardboard box
- 10 cardboard boxes ( 200 rnd) in PVC bag
- 10 PVC (2000 rounds) bags in wooden case

#### PACKAGE 3

- 200 rounds in metal link belt (M27)
- 4 metal link belts in metal box M2A1 (800 rounds)
- 2 metal boxes wire bound wooden box (1600 rounds)

# MMP

## AMMUNITION

### 7,62 x 39 mm

M67  
(Ball)



M78  
(Tracer)



AP  
(Armor  
piecing)



API  
(AP incendiary)



### CHARACTERISTICS

|                         |                  |                  |                  |                  |
|-------------------------|------------------|------------------|------------------|------------------|
| Bullet lenght           | 55,8 mm          | 55,8 mm          | 55,8 mm          | 55,8 mm          |
| Bullet weight           | 17,4 g           | 17,1g            | 17,4 g           | 17 g             |
| Projectile weight       | 8 g              | 7,7 g            | 8 g              | 7,55 g           |
| Projectile lenght       | 23,9 mm          | 27,8 mm          | 25,3 mm          | 26,4 mm          |
| Propellant charge       | ~1,67 g          | ~1,62 g          | ~1,7 g           | ~1,7 g           |
| Muzzle velocity         | 733 ± 8 m/s      | 706 ± 8 m/s      | 733 ± 8 m/s      | 733 ± 8 m/s      |
| Accuracy Rs<br>(PM M72) | < 15 cm at 300 m | < 30 cm at 300 m | < 20 cm at 300 m | < 20 cm at 300 m |
| Tracer burning time     |                  | 115 to 800 m     |                  |                  |

- **Penetration (API M82, AP):** the bullet of the sample cartridges shall demonstrate complete penetration of 6 mm thick nickel-chromium steel plate target located 100 meters from the weapon.
- **Incendiary (API):** at 100 m, the incendiary composition of bullets shall ignite paper soaked in petrol located behind the armor plate.

### PACKING

#### PACKAGE 1

- 15 rounds in cardboard box
- 10 cardboard boxes in PVC bag
- 12 PVC bags (1800 rounds) in wooden case

#### PACKAGE 2

- 15 rounds in cardboard box
- 54 cardboard boxes in metal box M2A1
- 2 metal boxes M2A1 in wire bound wooden box (1620 rounds)

# MMP

## AMMUNITION

### 7,62 x 51 mm

**M80**  
**(Ball)**



**M62**  
**(Tracer)**



**M61**  
**(Armor  
piercing)**



**API**  
**(Armored piercing  
incendiary)**



**APT**  
**(Armored piercing  
tracer)**



**M118**  
**(Sniper)**



#### CHARACTERISTICS

|                     |                                  |                         |                         |                         |                         |                         |
|---------------------|----------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Projectile weight   | 9,67 g                           | 9,46 g                  | 9,75 g                  | 8,75 g                  | 9,75 g                  | 10,9 g                  |
| Projectile length   | 29,46 mm                         | 34,29 mm                | 32,2 mm                 | 32,2 mm                 | 32,2 mm                 | 31,9 mm                 |
| Propellant charge   | ~ 2,85 g                         | ~2,8 g                  | ~2,82 g                 | ~2,82 g                 | ~2,82 g                 | ~2,7 g                  |
| Muzzle velocity     | 828 ± 9,1 m/s                    | 817 ± 9,1 m/s           | 838 ± 9,1 m/s           | 838 ± 9,1 m/s           | 917 ± 9,1 m/s           | 777 ± 9,14 m/s          |
| Accuracy Rs         | max A:12,7 B:19,1 cm<br>at 549 m | max 38,1 cm<br>at 549 m | max 19,1 cm<br>at 549 m | max 19,1 cm<br>at 549 m | max 38,1 cm<br>at 549 m | max 8,89 cm<br>at 548 m |
| Tracer burning time |                                  | 90 to min 777 m         |                         |                         | 92 to min 777 m         |                         |

- **Penetration (AP M61; API, APT):** The bullet of the sample cartridges shall demonstrate complete penetration of 6 mm thick nickel-chromium steel plate target located 100 meters from the weapon..
- **Incendiary (API):** At 100 m, the incendiary composition of bullets shall ignite paper soaked in petrol located behind the armorplate.
- **Accuracy :** A\* : for ammunition scheduled for packaging in cartons or clip  
B\* : for ammunition scheduled for packaging in links.

#### PACKING

##### PACKAGE 1

- 20 rounds in cardboard box
- 10 cardboard boxes (200 rounds) in PVC bag
- 5 PVC bags in wooden case

##### PACKAGE 2

- 250 rounds in metal link belt M13 (4Ball:1 Tracer)
- 1 metal link belt in metal box M19A1
- 4 metal boxes (1000 rounds) in wire bound wooden box

##### PACKAGE 3

- 250 rounds in metal link belt M13
- 2 metal link belts in metal box M2A1
- 2 metal boxes M2A1 (1000 rounds) in wire bound wooden box

##### PACKAGE 4

- 20 rounds in cardboard box
- 28 cardboard boxes (560 rounds) in metal box M2A1
- 2 metal boxes (1120 rounds) in wire bound wooden box

# MMP

## AMMUNITION

### 7,62 x 54R mm

M84  
(Ball)



M87  
(Tracer)



M90  
(Armor  
piecing)



Sniper



### CHARACTERISTICS

|                     |                      |                      |                      |                        |
|---------------------|----------------------|----------------------|----------------------|------------------------|
| Bullet lenght       | 77,16 mm             | 77,16 mm             | 77,16 mm             | 77,16 mm               |
| Bullet weight       | ~ 24,4 g             | ~ 23,2 g             | ~ 23,8 g             | ~ 100 pcs              |
| Projectile weight   | 11 g                 | 9,65 g               | 10,3 g               | 11,8 g                 |
| Projectile lenght   | 30,5 mm              | 36,6 mm              | 36 mm                | 32,9 mm                |
| Muzzle velocity     | 785 ± 10 m/s         | 810 ± 10 m/s         | 830 ± 10 m/s         | 785 ± 10 m/s           |
| Accuracy Rs         | max 18 cm<br>at 300m | max 36 cm<br>at 300m | max 20 cm<br>at 300m | max 12,6 cm<br>at 300m |
| Tracer burning time |                      | 1000 m               |                      |                        |

- **Penetration:** the bullet core or bullet of the cartridge shall completely perforate 10 mm of armor plate placed at 200 m from muzzle of the weapon.
- **Incendiary:** at 100 m, the incendiary composition of bullets shall ignite paper soaked in petrol located behind the armor plate.

### PACKING

#### PACKAGE 1

- 15 rounds in cardboard box
- 28 cardboard boxes (420 rounds) in metal box M2A1
- 2 metal boxes M2A1 (840 rounds) in wire bound wooden box

#### PACKAGE 2

- 15 rounds in cardboard box
- 10 cardboard boxes (150 rounds) in PVC bag
- 8 PVC bags (1200 rounds) in wooden case

# MMP

## AMMUNITION

### 7,9 x 57 mm

M49  
(Ball)



M70  
(Tracer)



### CHARACTERISTICS

|                                    |                      |                             |
|------------------------------------|----------------------|-----------------------------|
| Bullet lenght                      | 80,6 mm              | 80,6 mm                     |
| Bullet weight                      | ~ 27,2 g             | ~ 26,8 g                    |
| Projectile lenght                  | 34 mm                | 38,8 mm                     |
| Projectile weight                  | 12,85 g              | 12,55 g                     |
| Muzzle velocity                    | 720 ± 10 m/s         | 705 ± 10 m/s                |
| Accuracy Rs                        | max 9 cm<br>at 300 m | max 15 cm<br>at 300 m       |
| Proppelling charge<br>(NCD powder) | 3 g                  | 2,9 g                       |
| Tracer burning time                |                      | min 13,7-115 m<br>max 900 m |

- **Projectile material:** (M49)Jacket – Tombac, Core – Lead antimony; (M70) Jacket – Tombac, Core – Lead antimony, Tracer – Tracer compos, Foil - Tombac

### PACKING

#### PACKAGE 1

- 15 rounds in cardboard box
- 28 cardboard boxes (420 rounds) in metal box M2A1
- 2 metal boxes M2A1 (840 rounds) in wire bound wooden box


#### PACKAGE 2

- 15 rounds in cardboard box
- 10 cardboard boxes (150 rounds) in PVC bag
- 8 PVC bags (1200 rounds) in wooden case

# MMP

## AMMUNITION

### 12,7 x 99 mm

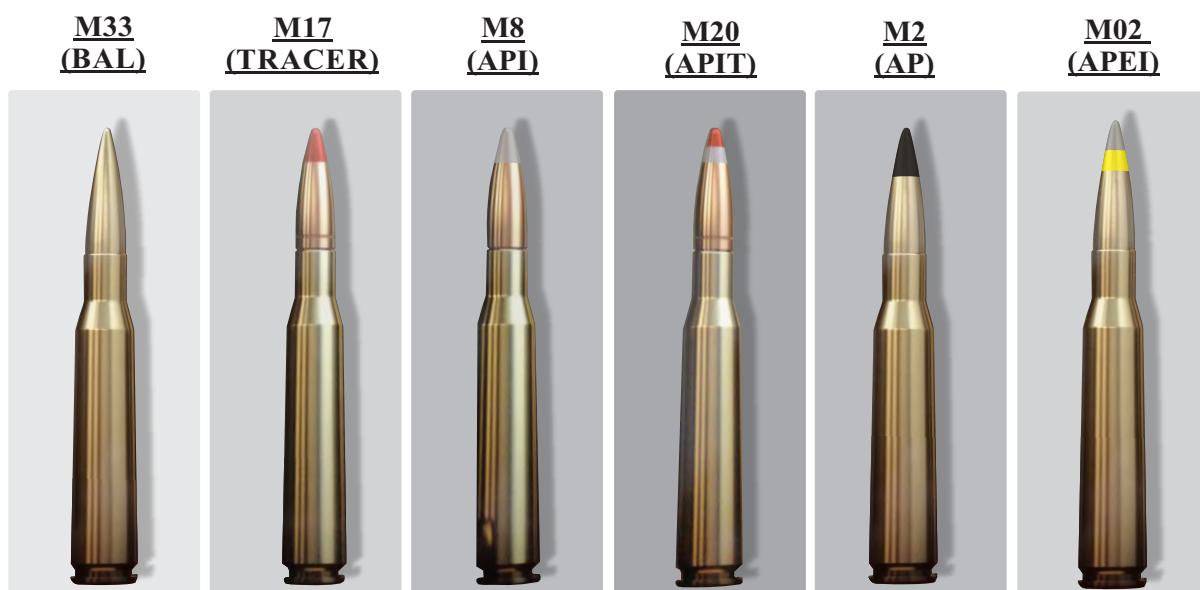

#### CHARACTERISTICS

|                   | <u>M33</u><br>(BAL)                                               | <u>M17</u><br>(TRACER)   | <u>M8</u><br>(API)       | <u>M20</u><br>(APIT)     | <u>M2</u><br>(AP)        | <u>M02</u><br>(APEI)     |
|-------------------|-------------------------------------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Bullet lenght     | 138,43 mm                                                         | 138,43 mm                | 138,43 mm                | 138,43 mm                | 138,43 mm                | 138,43 mm                |
| Bullet weight     | ~113,99 g                                                         | ~111,3 g                 | ~114,2 g                 | ~111,4 g                 | ~113,9 g                 | ~114,2 g                 |
| Projectile lenght | 58.67mm                                                           | 58,67 mm                 | 58,67 mm                 | 58,67 mm                 | 58,67 mm                 | 58,67 mm                 |
| Projectile weight | ~42,31 g                                                          | ~40,05 g                 | ~42,8 g                  | ~40,2 g                  | ~42,5 g                  | ~42,8 g                  |
| Propellant weight | 15,1 g                                                            | 14,9 g                   | 15,1 g                   | 14,9 g                   | 15,1 g                   | 15,1 g                   |
| Muzzle velocity   | 887±9.1 m/s                                                       | 887±9.1 m/s              | 887±9.1 m/s              | 887±9.1 m/s              | 887±9.1 m/s              | 887±9.1 m/s              |
| Accuracy Rs       | max 30,48 cm<br>at 549 m                                          | max 30,48 cm<br>at 549 m | max 30,48 cm<br>at 549 m | max 30,48 cm<br>at 549 m | max 30,48 cm<br>at 549 m | max 30,48 cm<br>at 549 m |
| Tracer burning    |                                                                   | from 92 to 1463 m        |                          | from 92 to 1463 m        |                          |                          |
| PACKAGE           | 1 and 2                                                           |                          |                          |                          |                          | 1, 2 and 3               |
| WEAPON            | 12,7 BROWNING, machine-gun M2 HB M85 and other compatible weapons |                          |                          |                          |                          |                          |

- **Penetration (M8, M2, M20):** The bullet core or bullet of the cartridge shall completely perforate 20 mm of armor plate placed at 100 m from the muzzle of the weapon. **Incendiary flash (M8 API):** The incendiary composition of bullets shall ignite produce an incandescent flash when fired against an Al- target at 160 m..
- **M02 APEI - Penetration:** penetrate steel plate at least 10.6 mm hardness 321–375 BRINEL, under 45° angle at 100 m.  
**Incendiary flash:** After fired against a target of DURAL plate 2 mm thick, under 0° angle, from 200 m distance the bullet must create an incendiary spark in distance smaller than 600 mm behind the plate. **Explosive effects :** After fired against a target of DURAL plate 2 mm thick, under 0° angle from 200 m distance the bullet must penetrate a steel plate 1.25 mm thick, placed in a distance 1,2 m behind the target with at least 10 frag..

#### PACKING

##### PACKAGE 1

- 140 rounds in metal box M2A1
- 2 metal boxes (280 rounds) in wire bound wooden box

##### PACKAGE 2

- 100 rounds in metal link belt M9
- 1 metal link belt in metal box M2A1
- 2 metal boxes (200 rounds) in wooden crate

##### PACKAGE 3

- 80 rounds in metal link belt M15A2
- 1 metal link belt in metal box M2A1
- 2 metal boxes (160 rounds) in wire bound wooden box

# MMP

## SPECIAL AMMUNITION

### 12,7 x 99 mm

#### M33 SNIPER

#### SOLID BALL

#### SOLID AP

#### SOLID API



### CHARACTERISTICS

|                   |                                   |                                   |                                   |                                    |
|-------------------|-----------------------------------|-----------------------------------|-----------------------------------|------------------------------------|
| Bullet lenght     | 138,43 mm                         | 138,43 mm                         | 138,43 mm                         | 138,43 mm                          |
| Bullet weight     | 100 pcs ± 2g                      | 100 pcs ± 2g                      | 100 pcs ± 2g                      | 100 pcs ± 2g                       |
| Projectile weight | ~ 41,82 g                         | ~ 46 g                            | ~ 47,1 g                          | ~ 52,6 g                           |
| Projectile lenght | 57,78 mm                          | 59,31 mm                          | 59,31 mm                          | 67,03 mm                           |
| Muzzle velocity   | 887 ± 9,1 m/s                     | 887 ± 9,1 m/s                     | 887 ± 9,1 m/s                     | 845 ± 9,1 m/s                      |
| Accuracy Rs       | < 19 cm at 548,4 m<br>(600 yards) | < 25,4 cm at 914m<br>(1000 yards) | < 25,4 cm at 914m<br>(1000 yards) | < 21,59 cm at 914m<br>(1000 yards) |

- **Penetration:** the bullet core or bullet of the cartridge shall completely perforate 20 mm of armor plate (hardness 302-341 HB) placed at 500 m from the muzzle of the weapon.
- **Incendiary (API):** at 500 m, the incendiary composition of bullets shall ignite paper soaked in petrol located behind the armor plate (80%).

### PACKING

#### PACKAGE 1

- 140 rounds in metal box M2A1
- 2 metal boxes (280 rounds) in wire bound wooden box


#### PACKAGE 2

- 10 rounds in cartoon box
- 5 cartoon boxes (50 rounds) in Al folium
- 2 Al folium (100 rounds) in cartoon box

# MMP

## AMMUNITION

### 12,7 x 108 mm

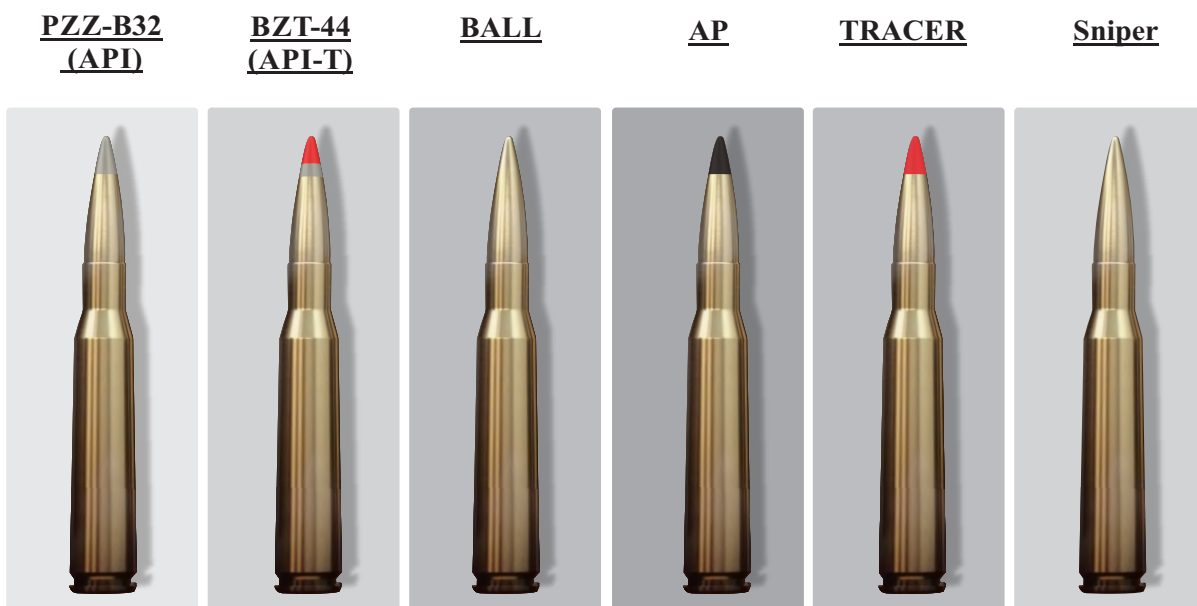

### CHARACTERISTICS

|                   |                                                   |                       |                       |                       |                       |                       |
|-------------------|---------------------------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Bullet length     | 147 mm                                            | 147 mm                | 147 mm                | 147 mm                | 147 mm                | 147 mm                |
| Bullet weight     | ~131,1 g                                          | ~126,6 g              | ~133,1 g              | ~133,1 g              | ~129 g                | ~134,1 g              |
| Projectile length | 64 mm                                             | 64,5 mm               | 64,6 mm               | 64,5 mm               | 64,5 mm               | 64 mm                 |
| Projectile weight | ~48 g                                             | ~44 g                 | ~48 g                 | ~48 g                 | ~44 g                 | ~49 g                 |
| Propellant weight | 16,5 g                                            | 16,5 g                | 16,5 g                | 16,5 g                | 16,5 g                | 17 g                  |
| Muzzle velocity   | 810 - 825 m/s                                     | 810 - 825 m/s         | 810 - 825 m/s         | 810 - 825 m/s         | 810 - 825 m/s         | 810 - 825 m/s         |
| Accuracy Rs       | max 20 cm<br>at 300 m                             | max 20 cm<br>at 300 m | max 20 cm<br>at 300 m | max 20 cm<br>at 300 m | max 20 cm<br>at 300 m | max 15 cm<br>at 300 m |
| Tracer burning    |                                                   | to 1000 m             |                       |                       | to 1000 m             |                       |
| WEAPON            | DShK, DShKM, NSVT and<br>other compatible weapons |                       |                       |                       |                       |                       |

**Penetration:** The bullet of the sample cartridge shall demonstrate complete penetration of armour-plate (HPA-10) in sia at 100 meters from the weapon:

- bullet B-32 and AP: 20 mm
- bullet BZT-44: 15 mm

### PACKING

#### PACKAGE 1

- 104 rounds in sheet metal box
- 2 sheet metal boxes (208 rounds)  
in wire bound wooden box


#### PACKAGE 2

- 60 rounds in a DShK belt
- 1 DShK belt in a box
- 3 boxes (180 rounds) in wooden box

# MMP


## AMMUNITION BLANCK

7,62x39  
M68

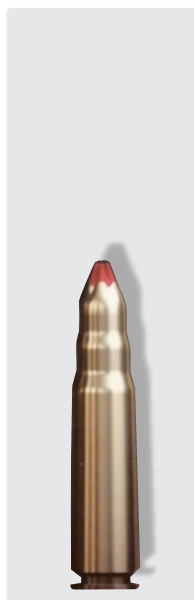

7,62x39  
IC

for rifle grenade

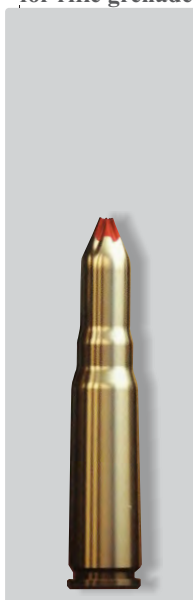

7,62x51  
M82



5,56x45  
M200



5,56x45  
M200A1



12,7x99  
M1A1



### CHARACTERISTICS

|                     |                        |           |                                     |                                     |                                     |                 |
|---------------------|------------------------|-----------|-------------------------------------|-------------------------------------|-------------------------------------|-----------------|
| Grenade caliber     | 49,3 mm                | 55,8 mm   | 64,50 mm                            | 48,2 mm                             | 53,70 mm                            | 99,46 mm        |
| Round weight        | ~ 9,2 g                | ~ 8,55 g  | ~ 11,8 g                            | ~ 6,9 g                             | ~ 6,74 g                            | ~ 6,74 g        |
| Average cyclic rate | ~ 475 rds/min          |           | 450-600 rds/min                     | 450-950 rds/min                     | 450-950 rds/min                     | 400-600 rds/min |
| PACKAGE             | package 1<br>package 2 | package 3 | package 4<br>package 5<br>package 6 | package 4<br>package 7<br>package 8 | package 4<br>package 7<br>package 8 | package 9       |

### PACKING

#### PACKAGE 1

- 15 rounds in cardboard box
- 10 cardboard boxes ( 150 rounds) in PVC bag
- 12 PVC bags (1800 rounds) in wooden case

#### PACKAGE 2

- 15 rounds in cardboard box
- 54 cardboard boxes in metal box M2A1
- 2 metal boxes M2A1 (1620 rounds) in wire bound wooden box

#### PACKAGE 3

- 15 rounds in cardboard box
- 10 cardboard boxes (150 rounds) in PVC foil

#### PACKAGE 4

- 20 rounds in cardboard box
- 10 cardboard boxes (200 rounds) in PVC bag
- 10 PVC (2000 rounds) bags in wooden case

#### PACKAGE 5

- 250 rounds in metal link belt M13
- 2 metal link belts in a metal box M2A1
- 2 metal boxes (1000 rounds) in wooden box

#### PACKAGE 6

- 250 rounds in metal link belt M13
- 1 metal link belts in a metal box M19A1
- 4 metal boxes (1000 rounds) in wooden box

#### PACKAGE 7

- 200 rounds in metal link belt (M27)
- 4 metal link belts in metal box M2A1
- 2 metal boxes (1600 rounds) in wooden box

#### PACKAGE 8

- 20 rounds in cardboard box
- 50 cardboard boxes in metal box M2A1
- 2 metal boxes (2000 rounds) in wooden box

#### PACKAGE 9

- 100 rounds in metal link belt M9
- 1 metal link belt in a metal box M2A1
- 2 metal boxes (200 rounds) in wooden box

# MMP

## GRENADES

### 30 mm

HE M93 P1



TP M93 P1



PM M93 P1



#### CHARACTERISTICS

|                         |              |              |              |
|-------------------------|--------------|--------------|--------------|
| Grenade caliber         | 30 mm        | 30 mm        | 30 mm        |
| Round weight            | 360 g        | 360 g        | 360 g        |
| Grenade weight          | 273 g        | 273 g        | 273 g        |
| Explosive weight        | 42 g         |              |              |
| Round lenght            | 132 mm       | 132 mm       | 132 mm       |
| Muzzle velocity         | 185 m/s      | 185 m/s      | 185 m/s      |
| Fuze arming distance    | 10+60 m      |              | 10+60 m      |
| Fuze self-destruct time | 27 s         |              | 27 s         |
| Maximum range           | 1700 m       |              | 1700 m       |
| Lethal radius           | 6 m          |              |              |
| Operating temperature   | -30° to 50°C | -30° to 50°C | -30° to 50°C |

#### WEAPON SYSTEM

AGL-30 mm; BGA-30 mm; AGS-17; KBA-117 or other similar weapons

#### PACKING

|                       |                    |
|-----------------------|--------------------|
| Rounds in Al-bag      | 48                 |
| Al-bag in wooden case | 2                  |
| Dimension of case     | 495 x 375 x 221 mm |
| Case weight           | 44 kg              |

# MMP

## GRENADES

### 40 mm


HE M03



HE M06



HEDP M04

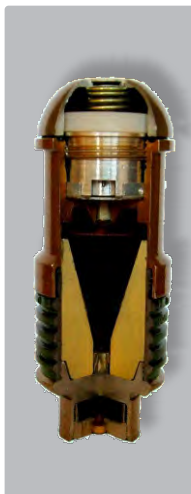

PRACTICE  
M03



SMOKE  
M04



ILLUMINATING  
M04



#### CHARACTERISTICS

|                         |              |              |              |              |                   |                               |
|-------------------------|--------------|--------------|--------------|--------------|-------------------|-------------------------------|
| Grenade caliber         | 40 mm        | 40 mm        | 40 mm        | 40 mm        | 40 mm             | 40 mm                         |
| Round weight            | 225 g        | 225 g        | 240 g        | 230 g        | 232 g             | 220 g                         |
| Explosive weight        | 48 g         | 48 g         | 42 g         |              |                   |                               |
| Round length            | 106 mm       | 106 mm       | 102 mm       | 106 mm       | 110 mm            | 127 mm                        |
| Muzzle velocity         | 78 m/s       | 78 m/s       | 78 m/s       | 78 m/s       | 76 m/s            | 76 m/s                        |
| Fuze arming distance    | 15 - 50 m    | 15 - 40 m    | 8 - 30 m     |              |                   |                               |
| Fuze self-destruct time | 12 - 20 s    | 12 - 20 s    |              |              | Delay time: 3-6 s | Delay time: 2,5-3,5 s         |
| Fire range              | 400 m        | 400 m        | 400          | 400          | 50 - 400          | 182+-30 m                     |
| Lethal radius           | 6 m          | 6 m          | 5 m          |              | Smoke time: 30 s  | Burning time: 20 s            |
| Penetration             |              |              | 60 mm        |              |                   | Light intensity:<br>80 000 cd |
| Operating temperature   | -30° to 50°C | -30° to 50°C | -30° to 50°C | -30° to 50°C | -30° to 50°C      | -30° to 50°C                  |

#### WEAPON

under barrel grenade launchers 40 mm GP-25 and GP-30, BGP-40

#### PACKING

|                     |                    |       |         |       |       |       |
|---------------------|--------------------|-------|---------|-------|-------|-------|
| Rounds in bag       | 1                  |       |         |       |       |       |
| Bags in wooden case | 162                |       |         |       |       |       |
| Dimension of case   | 540 x 400 x 348 mm |       |         |       |       |       |
| Case weight         | 49 kg              | 51 kg | 51,5 kg | 50 kg | 50 kg | 43 kg |

# MMP

## GRENADES

### 40 mm for RPG-7 and RBR-7

**PG-7VL**   **PG-7VM**   **PG-7VM**   **PG-7VT**   **PG-7V**   **KO-7V**   **OFG-7V**   **OG-7V**  
**PRACTICE**   **THERMOBARIC**



#### CHARACTERISTICS

|                                    |               |               |               |                     |                      |                      |                      |                      |
|------------------------------------|---------------|---------------|---------------|---------------------|----------------------|----------------------|----------------------|----------------------|
| Grenade launcher caliber           | 40 mm         | 40 mm         | 40 mm         | 40 mm               | 40 mm                | 40 mm                | 40 mm                | 40 mm                |
| Warhead caliber                    | 93 mm         | 70,5 mm       | 70,5 mm       | 93 mm               | 70,5 mm              | 57 mm                | 50 mm                | 40 mm                |
| Round weight                       | 2,6 kg        | 1,975 kg      | 1,975 kg      | 3,29 kg             | 4,27 kg              | 2,97 kg              | 2,95 kg              | 1,76 kg              |
| Precursor warhead calibre          |               |               |               | 50 mm               |                      |                      |                      |                      |
| Number/weight fragments            |               |               |               |                     |                      | 270 / 2 g            | 360 / 2 g            | >850 / 0,9 g         |
| Grenade weight                     | 2,2 kg        | 1,6 kg        | 1,6 kg        | 2,9 kg              | 3,88 kg              | 2,58 kg              | 2,56 kg              | 1,38 kg              |
| Propellant charge weight           | 0,39 kg       | 0,375 kg      | 0,375 kg      | 0,39 kg             | 0,39 kg              | 0,39 kg              | 0,39 kg              | 0,39 kg              |
| Muzzle velocity                    | 112 m/s       | 140 m/s       | 140 m/s       | 90 m/s              | 75 m/s               | 98 m/s               | 99 m/s               | 152 m/s              |
| Direct fire range                  | 250 m         | 300 m         | 300 m         | 200 m               | 220 m                | 250 m                | 250 m                | 170 m                |
| Sighting range                     | 300 m         | 500 m         | 500 m         | 250m                | max. range<br>1500 m | max. range<br>2000 m | max. range<br>2000 m | max. range<br>1000 m |
| Armor penetration                  | 500 mm        |               | 300 mm        | 500 mm<br>after ERA |                      | 260 mm               |                      |                      |
| Safe operational temperature range | -40° to 50°C  | -40° to 50°C  | -40° to 50°C  | -40° to 50°C        | -40° to 50°C         | -40° to 50°C         | -40° to 50°C         | -40° to 50°C         |
| Rate of fire                       | 4 - 6 rds/min | 4 - 6 rds/min | 4 - 6 rds/min | 4 - 6 rds/min       | 4 - 6 rds/min        | 4 - 6 rds/min        | 4 - 6 rds/min        | 4 - 6 rds/min        |

#### WEAPON SYSTEM

portable anti-tank grenade launcher equipped  
with combined optical-mechanical sight

#### PACKING

|                  |             |             |             |              |             |             |             |             |
|------------------|-------------|-------------|-------------|--------------|-------------|-------------|-------------|-------------|
| Dimensions (mm)  | 899x498x294 | 851x432x273 | 851x432x273 | 1136x474x307 | 899x498x294 | 880x450x270 | 880x450x270 | 833x454x262 |
| Rounds in a case | 6           | 6           | 6           | 6            | 6           | 6           | 6           | 18          |
| Gross weight     | 38 kg       | 32 kg       | 32 kg       | 50 kg        | 52kg        | 36 kg       | 36 kg       | 50 kg       |

# MMP

## GRENADES

### 73 mm

#### PG-9V



**WEAPON SYSTEM**  
SPG-9V heavy anti-tank  
grenade launcher

#### OG-9VM



**WEAPON SYSTEM**  
BSPG-9V heavy anti-tank  
grenade launcher

#### PG-15V



**WEAPON SYSTEM**  
2A28 gun mounted  
on BMP-1

### Basic tactical and technical characteristics:

|        | Caliber | Round weight | Grenade weight | Propellant charge weight | Muzzle velocity | Direct fire range | Sighting range          | Armour penetration |
|--------|---------|--------------|----------------|--------------------------|-----------------|-------------------|-------------------------|--------------------|
| PG-9V  | 73 mm   | 4,385 kg     | 2,615 kg       | 1,77 kg                  | 435 m/s         | 800 m             | 1300 m                  | 300 mm             |
| OG-9VM |         | 5,48 kg      | 3,68 kg        | 1,8 kg                   | 316 m/s         |                   | maximum range<br>4500 m | fragmentation      |
| PG-15V |         | 3,49 kg      | 2,615 kg       | 0,875 m                  | 400 m/s         | 800 m/s           | 1300 m                  | 300 mm             |

- **PG-9V** and **PG-15V** anti-tank HEAT grenades designed for destroying hostile armoured vehicles, mechanized troops and manpower in field-type shelters.
- **OG-9VM** fragmentation grenade designed for destroying enemy troops in the open, in trenches, field-type shelters or brick fortifications.
- For all grenades safe operational temperature range is for -40° to 50° C. Rate of fire is 4 -6 rds/min.

### Complete set:

#### PG-9V

- 6 rounds in a case
- Wooden packing case:
  - \* dimensions: 1082x520x298 mm
  - \* gross weight: 58 kg

#### OG-9VM

- 6 rounds in a case
- Wooden packing case:
  - \* dimensions: 1082x520x298 mm
  - \* gross weight: 60 kg

#### PG-15V

- 6 rounds in a case
- Wooden packing case:
  - \* dimensions: 1082x520x298 mm
  - \* gross weight: 51 kg

# MMP

## MORTAR SHELLS

### 60 mm

#### HE M73



- explosive charge is trotyl (TNT)
- explosive charge weight: 220 g
- fuse safety: 8 m (at lowest muzzle velocity)
- killing range radius: 10 m

#### SMOKE M73



- smoke charge weight: 190 g
- fuse safety: 8 m (at lowest muzzle velocity)

#### ILLUMINATING M67



- illuminating candle 200 g
- illuminating power: 180.000 Cd
- illuminating duration: 35 s
- mine parachute descent: 2,5 m/s

### Basic tactical and technical characteristics:

|                  | Caliber | Length with fuse | Weight with fuse | Fuse                                |
|------------------|---------|------------------|------------------|-------------------------------------|
| HE M73           | 60 mm   | 291 mm           | 1,35 kg          | UT M68 P1 impact fuse               |
| Smoke M73        |         | 286 mm           | 1,35 kg          | UT M68 P1 impact, superquick action |
| Illumination M67 |         | 330 mm           | 3,05 kg          | TP M67 pyrotechnical time           |

#### **Ballistic data:** *60mm Mortar M57, barrel length 720mm*

| Maximum range (0+4) | Minimum range (0) | Maximum pressure in barrel |
|---------------------|-------------------|----------------------------|
| 2550 m              | 94 m              | 414 bar                    |
| 2550 m              | 94 m              | 414 bar                    |
| 2450 m              | 400 m             | 414 bar                    |

- Ignition cartridge M80 (waterproof).
- Shell is completed with ignition cartridge and 4 increment charges (0+4). Shell Illumination M67 completed with waterproof increment charges.
- High safety during transportation, handling and parachuting.
- Reliable function of shell is obtained within temperature range of -30°C to 50°C.

### Complete set:

#### HE M73

- 1 complete shell per carton
- 12 cartons per wooden case
- Wooden packing case:
  - \* dimensions: 520x400x200 mm
  - \* gross weight: 29 kg
  - \* volume: 0,042 m<sup>2</sup>

#### SMOKE M73

- 1 complete shell per carton
- 12 cartons per wooden case
- Wooden packing case:
  - \* dimensions: 520x400x200 mm
  - \* gross weight: 29 kg
  - \* volume: 0,042 m<sup>2</sup>

#### ILLUMINATING M67

- 1 complete shell per carton
- 12 cartons per wooden case
- Wooden packing case:
  - \* dimensions: 520x400x200 mm
  - \* gross weight: 27 kg
  - \* volume: 0,042 m<sup>2</sup>

# MMP

## MORTAR SHELLS

### 81/82 mm

#### HE M72/M74



- explosive charge is trotyl (TNT)
- explosive charge weight: 680 g
- fuse safety: 8 m (at lowest muzzle velocity)
- killing range radius: 14 m

#### SMOKE M72/M74



- smoke charge weight: 550 g
- fuse safety: 8 m (at lowest muzzle velocity)

#### ILLUMINATING M67



- illuminating candle 400 g
- illuminating power: 500.000 Cd
- illuminating duration: 40 s
- mine parachute descent: 2,5 m/s

### Basic tactical and technical characteristics:

|                  | Caliber  | Length with fuse | Weight with fuse | Fuse                                |
|------------------|----------|------------------|------------------|-------------------------------------|
| HE M72/M74       | 81/82 mm | 375 mm           | 3,05 kg          | UT M68 P1 impact fuze               |
| Smoke M72/74     |          | 375 mm           | 3,05 kg          | UT M68 P1 impact, superquick action |
| Illumination M67 |          | 410 mm           | 2,95 kg          | TP M67 pyrotechnical time           |

#### Ballistic data:

*81/82mm Mortar M69 B-D, barrel length 1450mm*

| Maximum range (0+6) (M67 0+4) | Minimum range (0)         | Maximum pressure in barrel |
|-------------------------------|---------------------------|----------------------------|
| 5070 m                        | 91 m                      | 647 bar                    |
| 5070 m                        | 91 m                      | 647 bar                    |
| <sup>(0+4)</sup><br>3650 m    | <sup>(0+1)</sup><br>250 m | 422 bar                    |

- Shell M72/M74 is completed with ignition cartridge and 6 increment charges (0+6). Shell Illumination M67 with ignition cartridge and 6 waterproofs increment charges (0+4)
- High safety during transportation, handling and parachuting.
- Reliable function of shell is obtained within temperature range of -30°C to 50°C

### Complete set:

#### HE M72/M74

- 1 complete shell per carton
- 12 cartons per wooden case
- Wooden packing case:
  - \* dimensions: 520x440x160 mm
  - \* gross weight: 29 kg
  - \* volume: 0,038 m<sup>2</sup>

#### SMOKE M72/74

- 1 complete shell per carton
- 12 cartons per wooden case
- Wooden packing case:
  - \* dimensions: 520x440x160 mm
  - \* gross weight: 29 kg
  - \* volume: 0,038 m<sup>2</sup>

#### ILLUMINATING M67

- 1 complete shell per carton
- 12 cartons per wooden case
- Wooden packing case:
  - \* dimensions: 520x400x200 mm
  - \* gross weight: 27 kg
  - \* volume: 0,042 m<sup>2</sup>

# MMP

## MORTAR SHELLS

### 120 mm

#### HE M62P8



- explosive charge is hexolite (RDX/TNT) or trotyl (TNT)
- explosive charge weight: 2,45 kg
- fuse safety: 50 m (at lowest muzzle velocity)
- killing range radius: 20 m

#### SMOKE M64P2



- smoke charge weight: 2,45 kg
- fuse safety: 8 m (at lowest muzzle velocity)

#### ILLUMINATING M87P1



- illuminating candle 1,2 kg
- illuminating power: 1.000.000 Cd
- illuminating duration : 60 s
- mine parachute descent: 3 m/s

### Basic tactical and technical characteristics:

|                    |         |                  |                  |                                     | <b>Ballistic data:</b>                        |                     |                            |
|--------------------|---------|------------------|------------------|-------------------------------------|-----------------------------------------------|---------------------|----------------------------|
|                    |         |                  |                  |                                     | <i>120mm Mortar M57, barrel length 1500mm</i> |                     |                            |
|                    | Caliber | Length with fuse | Weight with fuse | Fuse                                | Maximum range (0+6) (M67 0+4)                 | Minimum range (0+1) | Maximum pressure in barrel |
| HE M62P8           | 120 mm  | 606 mm           | 12,6 kg          | UTU M93P1 SQ/D impact fuze          | 6500 m                                        | 255 m               | 961 bar                    |
| Smoke M64P2        |         | 600 mm           | 12,6 kg          | UT M68 P1 impact, superquick action | 6500 m                                        | 255 m               | 961 bar                    |
| Illumination M87P1 |         | 670 mm           | 10,7 kg          | TP M67 pyrotechnical time           | (0+5) 6000 m                                  | (0+1) 400 m         | 620 bar                    |

- Shells HE M62P8 and Smoke M64P2 are completed with ignition cartridge and 6 increment charges M74 (0+6), and shell Illumination M87P1 with ignition cartridge and 5 waterproof increment charges M74 (0+5).
- High safety during transportation, handling and parachuting.
- Reliable function of shell is obtained within temperature range of -30°C to 50°C.

### Complete set:

#### HE M62P8

- 1 complete shell per carton
- 2 cartons per wooden case
- Wooden packing case:
  - \* dimensions: 710x350x180 mm
  - \* gross weight: 38 kg
  - \* volume: 0,045 m<sup>2</sup>

#### SMOKE M64P2

- 1 complete shell per carton
- 2 cartons per wooden case
- Wooden packing case:
  - \* dimensions: 710x350x180 mm
  - \* gross weight: 38 kg
  - \* volume: 0,045 m<sup>2</sup>

#### ILLUMINATING M87P1

- 1 complete shell per carton
- 2 cartons per wooden case
- Wooden packing case:
  - \* dimensions: 780x350x180 mm
  - \* gross weight: 35 kg
  - \* volume: 0,049 m<sup>2</sup>

# MMP

## ARTILLERY MUNITIONS

### HE -FRAG

#### 100 mm



#### 122 mm



#### 130 mm



#### 152 mm



#### CHARACTERISTICS

| Type of charge                     | Full         | Reduced  | Full         | Reduced | Full         | Reduced | Full         | Reduced  |
|------------------------------------|--------------|----------|--------------|---------|--------------|---------|--------------|----------|
| Type                               | HE-FRAG      |          | HE-FRAG      |         | HE-FRAG      |         | HE-FRAG      |          |
| Grenade weight (fused)             | 30,27 kg     | 26,74 kg | 21,76 kg     |         | 33,4 kg      |         | 43,56 kg     |          |
| Charge weight                      |              |          | 7,83 kg      | 6,44 kg | 25,7 kg      | 18,5 kg | 16,36 kg     | 12,01 kg |
| Muzzle velocity                    | 900 m/s      | 600 m/s  | 690 m/s      | 565 m/s | 930 m/s      | 705 m/s | 655 m/s      | 511 m/s  |
| Range                              | 20,65 km     | 11 km    | 15,3 km      | 12,5 km | 27,49 km     | 19 km   | 17,42 km     | 13,4 km  |
| Safe operational temperature range | -40° to 50°C |          | -40° to 50°C |         | -40° to 50°C |         | -40° to 50°C |          |

#### WEAPON SYSTEM

BS-3 field gun (M1944)  
D-10T, D-10S, D-10T2S tank guns,  
SAU-100 self-propelled gun

D-30 howitzer  
2S1 self-propelled howitzer

M-46 gun

ML-20 howitzer-gun  
D-20 howitzer-gun  
2S3 (2S3M) self-propelled howitzer.

#### PACKING

| Dimensions case  | 1205 x 430 x 253 mm |       | 1210 x 435 x 258 mm |       | 960 x 488 x 280 mm |       | 835 x 488 x 280 mm |       |
|------------------|---------------------|-------|---------------------|-------|--------------------|-------|--------------------|-------|
| Rounds in a case | 2                   |       | 2                   |       | 1                  |       | 1                  |       |
| Gross weight     | 87 kg               | 80 kg | 83 kg               | 80 kg | 86 kg              | 79 kg | 83 kg              | 79 kg |

# MMP

## ARTILLERY MUNITIONS

### HE / SMOKE

#### 76 mm



#### 105 mm



#### 122 mm



#### CHARACTERISTICS

| NATO designation         | HE SHELL<br>M70                     | SMOKE SHELL<br>M60 | HE SHELL<br>M1A1                                       | SMOKE SHELL<br>M60 | HE SHELL<br>TF-462A1                   | HE SHELL<br>TF-462A1  |
|--------------------------|-------------------------------------|--------------------|--------------------------------------------------------|--------------------|----------------------------------------|-----------------------|
| Projectile weight        | 6,2 kg                              | 6,2kg              | 15,1 kg                                                | 15 kg              | 21,8 kg                                |                       |
| Explosive weight         | 0,61 kg                             | 0,43 kg            | 2,15 kg                                                | 1,85 kg            | 3,6 kg                                 |                       |
| Propelling charge weight | 1,32 kg                             |                    | 1,31 kg                                                |                    | reduced charge<br>2,47 kg              | full charge<br>3,8 kg |
| Cartridge case weight    | 1.55 kg                             |                    | 2,68 kg                                                |                    | 3,66 kg                                |                       |
| Explosive type           | TNT                                 | WP                 | TNT                                                    | WP                 | TNT                                    |                       |
| Projectile length        | 347 mm                              |                    | 496 mm                                                 |                    | 561 mm                                 |                       |
| Cartridge case length    | 385 mm                              |                    | 372 mm                                                 |                    | 447 mm                                 |                       |
| Muzzle velocity          | 398 m/s                             |                    | 491 m/s                                                | 491,472 m/s        | 565 m/s                                | 690 m/s               |
| Maximum range            | 8,75 km                             |                    | 11,62 km                                               |                    | 12,84 km                               | 15,3 km               |
| Fuse type                | UTIU, M68 P1                        |                    | UTIU, M72 B1<br>UTIU, M02<br>UTIU, M03                 | UTIU, M72 B1       | UTIU, M72 B1<br>UTIU, M02<br>UTIU, M03 |                       |
| Fuse action              | impact, superquick and delay action |                    | impact, superquick and delay action                    |                    | impact, superquick and delay action    |                       |
| WEAPON SYSTEM            | GUN 76 MM M48B1                     |                    | SEMI FIXED HOWITZERS 105mm<br>M56, M18/61, M2A1 AND M4 |                    | HOWITZER 122mm<br>D30, D30J AND SP 2S1 |                       |
| PACKING                  |                                     |                    |                                                        |                    |                                        |                       |
| Dimensions               | 690 x 440 x 215 mm                  |                    | 950 x 310 x 200 mm                                     |                    | 980 x 500 x 230 mm                     |                       |
| Rounds in a case         | 3                                   |                    | 2                                                      |                    | 2                                      |                       |
| Gross weight / volume    | 39 kg / 0,06 m³                     |                    | 55 kg / 0,05 m³                                        |                    | 80 kg / 0,1 m³                         |                       |

# MMP

## ARTILLERY MUNITIONS

### ILLUMINATING / PRACTICE

**122 mm**



**152 mm**



#### CHARACTERISTICS

| Type of charge                     | Full                                         | Reduced  | Full                                                                  | Reduced  |
|------------------------------------|----------------------------------------------|----------|-----------------------------------------------------------------------|----------|
| Type                               | ILLUMINATING<br>PRACTICE                     |          | ILLUMINATING                                                          |          |
| Grenade weight (fused)             | 21,3 kg                                      |          | 41,95 kg                                                              |          |
| Charge weight                      | 7,835 kg                                     | 6,435 kg | 16,36 kg                                                              | 12,01 kg |
| Illumination intensity             | >1.000.000 cd                                |          | >1.000.000 cd                                                         |          |
| Muzzle velocity                    | 690 m/s                                      | 565 m/s  | 652 m/s                                                               | 509 m/s  |
| Range                              | 15,3 km                                      | 12,5 km  | 16,65 km                                                              | 13,17 km |
| Rate of descent                    | 7,5 - 9,5 m/s                                |          | 7,5 - 9,5 m/s                                                         |          |
| Burning time                       | i50 s                                        |          | i50 s                                                                 |          |
| Safe operational temperature range | -40° to 50°C                                 |          | -40° to 50°C                                                          |          |
| WEAPON SYSTEM                      | D-30 howitzer<br>2S1 self-propelled howitzer |          | D-20 howitzer<br>2S3 self-propelled howitzer and<br>its modifications |          |

#### PACKING

| Dimensions       | 1210 x 435 x 258 mm |       | 835 x 488 x 280 mm |       |
|------------------|---------------------|-------|--------------------|-------|
| Rounds in a case | 2                   |       | 1                  |       |
| Gross weight     | 83 kg               | 80 kg | 82 kg              | 78 kg |

# MMP

## ARTILLERY MUNITIONS

### Cal. 155 mm



#### CHARACTERISTICS

| Projectile designation   |         | ERFB SMOKE (WP) M09        | HE ERFB M03   | HE ERFB BB M03 | HE M107        |
|--------------------------|---------|----------------------------|---------------|----------------|----------------|
| Projectile weight        |         | ~54,5 kg                   | ~45,5 kg      | ~47,6 kg       | ~43,047 kg     |
| Explosive weight         |         | ~8.7 kg (white phosphorus) | ~8.7 kg (TNT) | ~8.7 kg (TNT)  | ~6.72 kg (TNT) |
| Projectile length        |         | 938 mm                     | 938 mm        | 938 mm         | 681mm          |
| Propelling charge weight | zone 8  | ~8,5 kg                    | ~8,5 kg       |                | ~8,5 kg        |
|                          | zone 9  | ~12,9 kg                   | ~12,9 kg      |                |                |
|                          | zone 10 | ~15,2 kg                   | ~15,6 kg      | ~15,6 kg       |                |
| Muzzle velocity          | zone 8  | ~680 m/s                   | ~680 m/s      |                | ~690 m/s       |
|                          | zone 9  | ~820 m/s                   | ~820 m/s      |                |                |
|                          | zone 10 | ~900 m/s                   | ~900 m/s      | ~925 m/s       |                |
| Maximum range            | zone 8  | 20,6 km                    | 20,6 km       |                | 18,4 km        |
|                          | zone 9  | 26,6 km                    | 26,6 km       |                |                |
|                          | zone 10 | 32,2 km                    | 32,2 km       | 41,1 km        |                |
| Fuse type                |         | UTIU, M02                  | UTIU, M02     | UTIU, M02      | UTIU, M02-P1   |
| WEAPONS                  |         | STH 155 mm NORA B52 M03    |               |                |                |

#### PACKING

| separately packing of projectiles, propelling charges MC (zone 8, zone 9, zone 10) and fuzes |  |                                                     |                                                                              |
|----------------------------------------------------------------------------------------------|--|-----------------------------------------------------|------------------------------------------------------------------------------|
| Description                                                                                  |  | Projectiles                                         | Propelling charges MC (zone 8, zone 9, zone 10)                              |
|                                                                                              |  | 8 projectiles on a palette                          | charge and primer in plastic container<br>20 plastic containers on a palette |
| Dimensions                                                                                   |  | 760 x 360 x 1050 mm                                 | 1150 x 1020 x 1057 mm                                                        |
| Gross weight / volume                                                                        |  | 421 kg / 0,28 m <sup>3</sup>                        | 440 kg / 1,24 m <sup>3</sup>                                                 |
|                                                                                              |  | Fuze                                                |                                                                              |
|                                                                                              |  | 8 fuzes in a metal box, 80 metal boxes on a palette |                                                                              |
|                                                                                              |  | 1222 x 800 x 895,5 mm                               |                                                                              |
|                                                                                              |  | 646 kg / 0,875 m <sup>3</sup>                       |                                                                              |

# MMP

## MUNITIONS FOR TANK GUNS cal. 125 mm



### CHARACTERISTICS

|                               |                                |                            |                            |
|-------------------------------|--------------------------------|----------------------------|----------------------------|
| NATO designation              | APFSDS-T<br>M88                | HEAT-T<br>M88P1            | HE-FRAG<br>M86P2           |
| Complete cartridge weight     | ~20 kg                         | ~29 kg                     | ~33 kg                     |
| Projectile weight             | ~10 kg                         | ~19 kg                     | ~23 kg                     |
| Subcaliber bullet weight      | ~5,67 kg                       |                            |                            |
| Base propelling charge weight | ~2 kg                          | ~10 kg                     | ~10 kg                     |
| Explosive weight              |                                | ~2 kg                      | ~3,28 kg                   |
| Complete cartridge length     | 999 mm                         | 1086 mm                    | 1082 mm                    |
| Projectile length             | 591 mm                         | 678 mm                     | 674 mm                     |
| Muzzle velocity               | ~1785 m/s                      | ~905 m/s                   | ~850 m/s                   |
| Maximum range                 | 4 km                           | 4 km                       | 12,2 km                    |
| Penetration depth             | 275 cm                         | 400 cm                     |                            |
| Penetrator                    | core of tungsten carbide alloy |                            |                            |
| Tracer burning                | 2 s                            | 4 s                        |                            |
| Fuse type                     |                                | UT-PE M87P1                | UTIU M85P1                 |
| Fuse action                   |                                | mechanical/piezoelectrical | PD/delay                   |
| WEAPONS                       | CANNONS ON TANKS T-72 AND M84  |                            |                            |
| PACKING                       |                                |                            |                            |
| Dimensions                    | 858 x 440 x 295 mm             | 858 x 440 x 295 mm         | 858 x 539 x 272 mm         |
| Rounds in a case              | 1                              | 1                          | 1                          |
| Gross weight / volume         | 55 kg / 0,1 m <sup>3</sup>     | 55 kg / 0,1 m <sup>3</sup> | 60 kg / 0,1 m <sup>3</sup> |

# MMP

## ROCKETS FOR MULTI-TUBE LAUNCHER

### GRAD M21 OF



GRAD MB21

### PLAMEN-A M63



PLAMEN-C

### PLAMEN-D M87



### Basic tactical and technical characteristics:

|              | Caliber | Weight   | Length  | Warhead weight | Maximum range | Minimum range | Maximum velocity |
|--------------|---------|----------|---------|----------------|---------------|---------------|------------------|
| GRAD M21 OF  | 122 mm  | 66,18 kg | 2875 mm | 19,1 kg        | 21 km         | 5 km          | 690 m/s          |
| PLAMEN-A M63 | 128 mm  | 23,1 kg  | 837 mm  | 2,61 kg        | 8,6 km        |               |                  |
| PLAMEN-D M87 |         | 25,5 kg  | 670 mm  | 3,3 kg         | 12,625 km     |               |                  |

- Crew can fire the rockets from the cab or from a trigger at the end of a cable. All 40 rockets can be fired away in as little as 20 - 40 seconds, but can also be fired individually or in small groups in several-second intervals.
- "Plamen C" fires two types of missiles: PLAMEN-A M63 and PLAMEN-D M87 with extended range.
- GRAD 122 mm MB21 area of effect: against manpower - 708m<sup>2</sup>, against combat equipment - 225 m<sup>2</sup>
- PLAMEN 128 mm radius of effect is 30 m.

### Complete set:

#### GRAD M21 OF

- 1 rocket in wooden case
- Wooden packing case:
  - \* dimensions: 2807x280x252 mm
  - \* gross weight: 100 kg

# MMP

## AIRCRAFT ROCKET

### S-5KO

### S-8KOM

### BR-1-57

### BR-2-57

### BR-20-57P1

### S-8

### S-8


Fuse UTI-1

Fuse UTI-2

Fuse UTI-2

ORIGINAL

EDePro



### CHARACTERISTICS

|                                    |              |                         |                              |                           |                 |                          |                          |
|------------------------------------|--------------|-------------------------|------------------------------|---------------------------|-----------------|--------------------------|--------------------------|
| Rocket caliber                     | 57 mm        | 80 mm                   | 57 mm                        | 57 mm                     | 57 mm           | 80 mm                    | 80 mm                    |
| Type                               | HEAT<br>FRAG | HEAT                    | FRAG                         | HEAT                      | HEAT<br>FRAG    | HEAT                     | HEAT                     |
| Rocket weight                      | 4,5 kg       | 11,3 kg                 | 3,9 kg                       | 3,64 kg                   | 4,5 kg          | 11,2 kg                  | 11,2 kg                  |
| Rocket lenght                      | 0,987 m      | 1,57 m                  | 0,882 m                      | 0,835 m                   | 1,2 m           | 1,54 m                   | 2,4 m                    |
| Warhead weight                     | 1,36 kg      | 3,6 kg<br>(0,9kg expl.) | 0,815 kg<br>(0,285 kg expl.) | 1,1 kg<br>(0,29 kg expl.) | (0,32 kg expl.) | 3,6 kg<br>(0,9 kg expl.) | 3,6 kg<br>(0,9 kg expl.) |
| Number/weight fragments            | 220 / 2 g    | 400 / 3 g               |                              |                           | 200             |                          |                          |
| Muzzle velocity                    | 45 m/s       | 55-75 m/s               | 37-56 m/s                    | 67-90 m/s                 | 37-90 m/s       |                          |                          |
| Maximum inherent velocity          | 586 m/s      | 600 m/s                 | 673 m/s                      | 563-620 m/s               | 563-673 m/s     | 600 m/s                  | 600 m/s                  |
| Motor burning time                 | 1,1 s        | 1,8 / s                 | 0,5-0,92 / s                 | 0,46-0,92 / s             | 0,46-0,92 / s   | 1,3 / s                  | 1,1 / s                  |
| Burning range                      | 300 m        |                         | 250-360 m                    | 198-289 m                 | 198-360 m       |                          |                          |
| Armor penetration                  | 172 mm       | 400 mm                  |                              | 100-150 mm                | 160-200 mm      | 400 mm                   | 420 mm                   |
| Safe operational temperature range | -60° to 50°C | -60° to 60°C            | -50° to 60°C                 | -60° to 50°C              | -60° to 50°C    | -60° to 60°C             | -60° to 60°C             |
| Radius killing range               |              |                         |                              |                           | 18-20 m         |                          |                          |

### WEAPON SYSTEM

UB-16, UB-32  
universal launcher  
pods and their  
modifications

aircraft: B8, B8M,  
B8M1,B80, B8S7  
helicopter: B8V20A,  
B8V7 launchers

honeycomb  
launchers  
L-57

honeycomb  
launchers  
L-57

honeycomb  
launchers  
L-57

aircraft: B8, B8M,  
B8M1,B80, B8S7  
helicopter: B8V20A,  
B8V7 launchers

aircraft: B8, B8M,  
B8M1,B80, B8S7  
helicopter: B8V20A,  
B8V7 launchers

### PACKING

|                  |              |              |   |   |       |
|------------------|--------------|--------------|---|---|-------|
| Dimensions (mm)  | 1160x368x294 | 1785x317x302 |   |   |       |
| Rounds in a case | 8            | 4            | 8 | 8 | 12    |
| Gross weight     | 53 kg        | 68 kg        |   |   | 67 kg |

# MMP

## AIR BOMBS

Air Bomb is intended for annihilation and disabling of live force and technical devices such as: light armor combat and non-combat vehicles, artillery, rocket, radar devices and installations, landed aircraft etc.

**FAB-100 M80 HE**



**FAB-250 M79 HE**



**RAB-250M91**



### CHARACTERISTICS

| Description                                     | free fall                                 | with UKB-100 M80 Retarder System | free fall                                 | with UKB-250 M80 Retarder System | free fall                                 |
|-------------------------------------------------|-------------------------------------------|----------------------------------|-------------------------------------------|----------------------------------|-------------------------------------------|
| Bomb weight                                     | 119,5 kg                                  | 130,5 kg                         | 244 kg                                    | 295,5 kg                         | 252 kg                                    |
| Explosive weight                                | 39 kg TNT                                 |                                  | 105 kg TNT                                |                                  | 70 kg TNT                                 |
| Tail unit weight                                |                                           |                                  |                                           |                                  | 14,5 kg                                   |
| Diameter of the body                            | 230 mm                                    |                                  | 325 mm                                    |                                  | 320 mm                                    |
| Bomb length                                     | 1490 mm                                   | 1617 mm                          | 2016 mm                                   | 2200 mm                          | 2085 mm                                   |
| Max. aircraft speed                             | 900 km/h                                  |                                  | 900 km/h                                  |                                  | 900 km/h                                  |
| Min. safe distance (aircraft - detonation site) | 500 m                                     |                                  | 500 m                                     |                                  | 500 m                                     |
| Hook spacing                                    | 250 mm or 355,6 mm (standardNATO 14-inch) |                                  | 250 mm or 355,6 mm (standardNATO 14-inch) |                                  | 250 mm or 355,6 mm (standardNATO 14-inch) |
| Number fuze / Fuze type                         | 2 / AUV-E or AUFK M91                     | 2 / AUFK M91                     | 2 / AUV-E or AUFK M91                     | 2 / AUFK M91                     | 1 / UPB M91                               |
| Safe operational temperature range              | - 40° to + 50° C                          |                                  | - 40° to + 50° C                          |                                  | - 40° to + 50° C                          |
| Number of steel balls Ø12mm                     |                                           |                                  |                                           |                                  | 15.000                                    |

### PACKING


|       |                 |                           |                           |
|-------|-----------------|---------------------------|---------------------------|
| Bombs | 3 in a crate    | 1 inside protective rings | 1 inside protective rings |
| Fins  | 12 in a crate   | 9 in a crate              | 9 in a crate              |
| UKB   | 3 in wooden box | 2 in wooden box           |                           |

# MMP

## TORPEDO

### 53-65 KE

Self homing torpedo, is guided to the trail of the target ship and is used for destroying ships at sea. The torpedo uses oxygen for propulsion and has great speed and range and does not leave trail when it is moving. There are two forms of the torpedo: battle and training one.

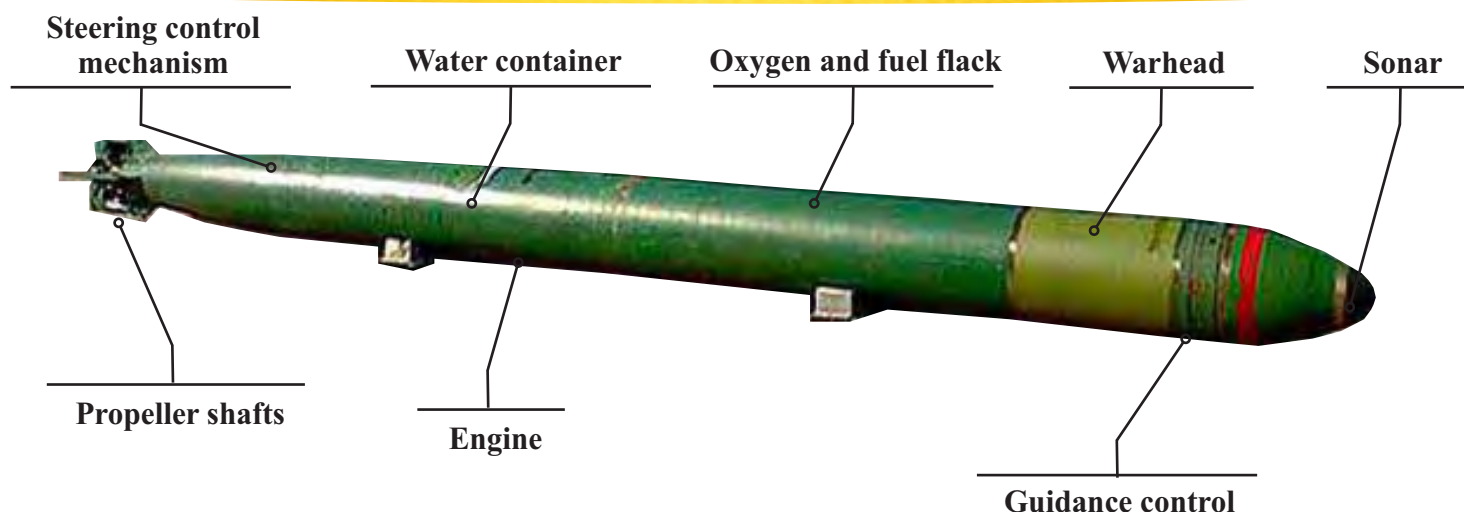

#### Basic tactical and technical characteristics:

|               | Caliber           | Lenght        | Weight ready for firing | Weight of explosive charge          | Weight of warhead      | Cylindrical continuation               |                        |
|---------------|-------------------|---------------|-------------------------|-------------------------------------|------------------------|----------------------------------------|------------------------|
|               |                   |               |                         |                                     |                        | Length                                 | Weight with water      |
| 53-65 KE      | 533,4 mm          | 7945 mm       | 2070 kg                 | 290 kg                              | 518+/-10kg             | 1100 mm                                | 273 kg                 |
| Training tor. |                   |               | 1930 kg                 |                                     |                        |                                        |                        |
|               | Depth of cruising | Range of fire | Speed                   | Sonar system                        | Influence exploder     | Engine caracteristics                  | Propeler               |
| 53-65 KE      | 4 - 12 m          | 19000 m       | 83 km/h                 | acoustic to the target ship's trail | active electromagnetic | turbine, one stage, 25 000 rpm, 430 hp | 1670 rpm               |
| Training tor. | 2 - 14 m          | 11000 m       | 80 km/h                 |                                     |                        |                                        |                        |
|               | Oxygen            |               | Fuel petroleum          | Air                                 |                        | Water                                  |                        |
|               | Ammout            | Pressure      |                         | Volume                              | Pressure               | Water flask                            | compensation container |
| 53-65 KE      | 630 l             | 210 kg/cm²    | 65 l                    | 2 x 8,5 l                           | 200 kg/cm²             | 6,7 l                                  | 11,5 l                 |
| Trening tor.  | 437 l             |               | 45 l                    | 1 x 8,5 l                           |                        |                                        |                        |

- The torpedo is launched from the ships and submarines from the depth of 100 m. After launching it makes a sudden drop of 15-20 m, so it is necessary that the depth of the sea below the ship of the submarine is not less than 40m.
- The depth to which the submarine is allowed to dive with battle torpedo is 200 m and with training torpedo 120 m. The speed of the torpedo during launching is not limited.
- GAZ of the ship should not be less than 2m, if otherwise the self homing of the torpedo cannot be performed. The angle of the first crossing the trail of the ship is allowed to be in ranges 20-160°.





**[www.mmp-weapons.com](http://www.mmp-weapons.com)**

**MMP Investment Ltd.**

13 Simeonovska Str., Simeonovo quarter, Sofia, Bulgaria

e-mail: [investment.ltd@mmp-weapons.com](mailto:investment.ltd@mmp-weapons.com)

[mmp.investment.ltd@gmail.com](mailto:mmp.investment.ltd@gmail.com)

phone: +359 2 961 40 40

**MMP Consulting DOO**

Str. Zagorska 13 B, Belgrade 11 000, Serbia

e-mail: [consulting.doo@mmp-weapons.com](mailto:consulting.doo@mmp-weapons.com)

[mmp.consulting.doo@gmail.com](mailto:mmp.consulting.doo@gmail.com)

phone: +381 112 648 960





